


HIKOKI

HIGH PERFORMANCE POWER TOOLS

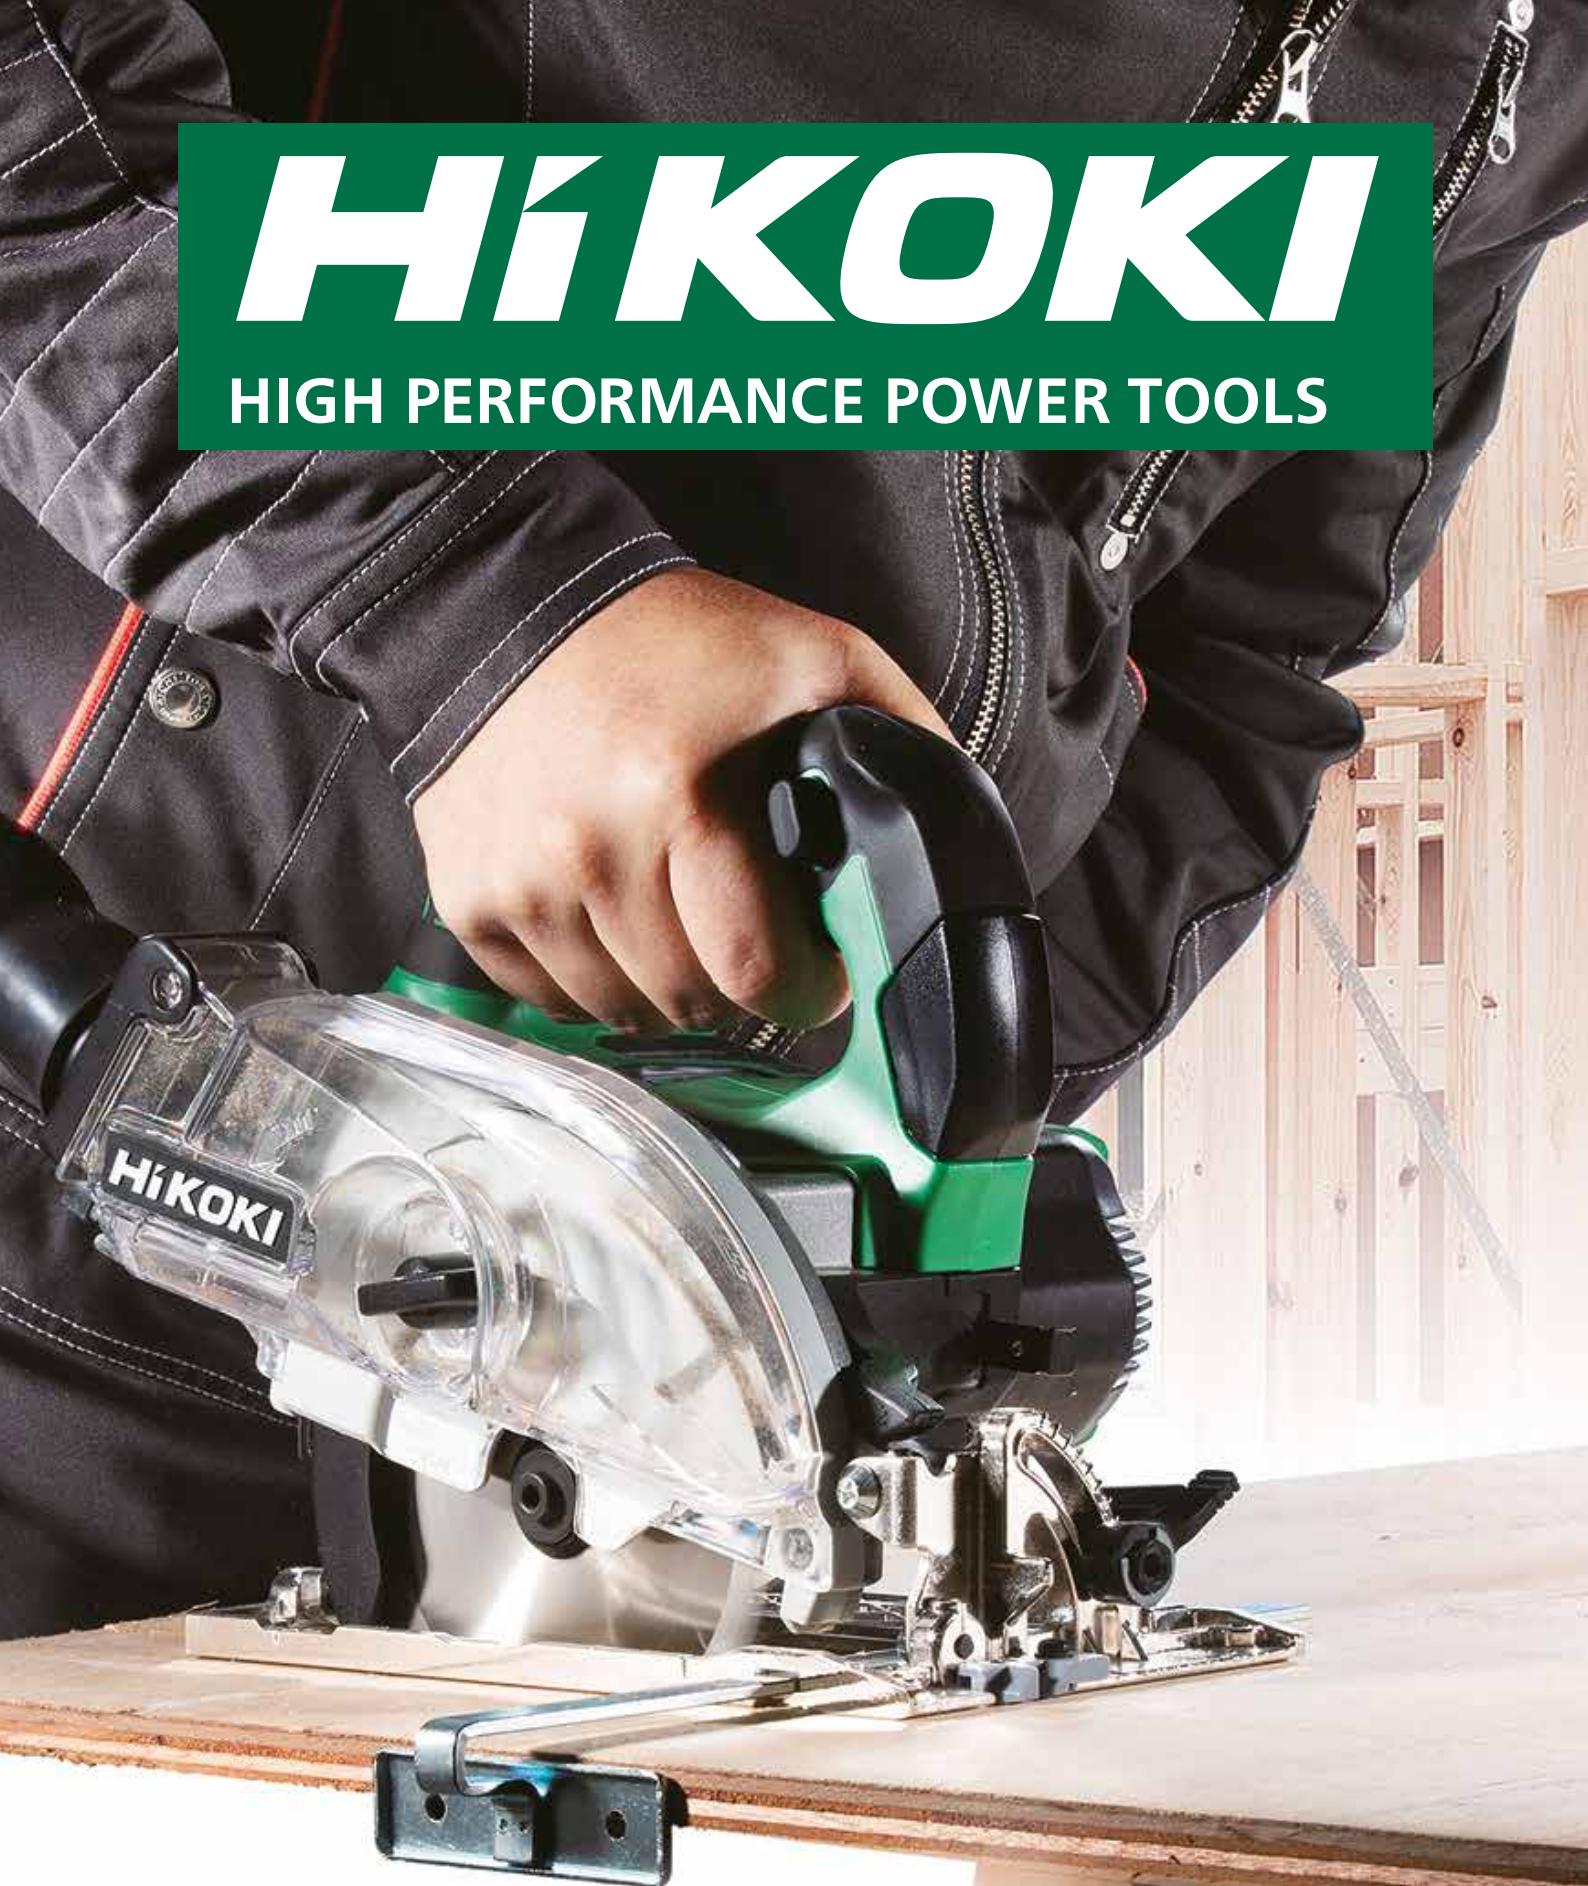

**Power tools
catalogue
Issue 4**

Contents

Everything you need for the highest power tool performance.

Introduction

HiKOKI service

Index

Technologies

Cordless

Screwdrivers	12
Angle drills	12
Drill/drivers	13
Combi drills	14
Impact drivers	16
Impact wrenches	18
Hammer drills	20
Angle grinders	24
Mitre saws	26
Metal cutting saw	27
Circular saws	28
Reciprocating saws	29
Jigsaws	29
Multi tool	30
Bandsaw	30
Planer	30
Stud cutters	31
Shear	31
Nibbler	31
Vacuum	31
Cleaners	32
Nailers	34
Radio	36
Torches	36
Charger	37
Mains Adapter	37
Multi Volt batteries	37
Hedgetrimmer	38
Chainsaw	38
Grass trimmers	39
Blower	39
Kits	40
Heated outerwear	44
USB battery adapters	44
Stackable cases	44

Drilling

Rotary Drills	47
Impact drills	48

Demolition

Rotary hammer drills	50
Rotary demolition hammers	51
Demolition hammers	52

Fastening

Screwdrivers	54
Impact wrenches	54

Sawing

Circular saws	56
Jigsaws	57
Mitre saws	58
Reciprocating saws	59
Multi tool	59

Routing & Planing

Routers	60
Planers	60

Sanding & Polishing

Random orbit sanders	61
Palm Sander	62
Belt sanders	62
Sander polisher	62

Grinding

Die grinders	63
Angle grinders	63

Cutting

Nibbler	67
Cut-off machine	67
Disc cutters	67

Miscellaneous

Mixers	68
Blower	68

Nailers

Gas nailers	69
Pneumatic nailer	69

Spares

Carbon brushes	70
----------------	----

Introduction

Safety

Double-Insulation power tool, indicated by the double square mark , can be operated without external grounding. All HiKOKI power tools are designed and manufactured considering safety and usability. HiKOKI power tools are provided with various safety features like brakes, covers and clutches.

Power input

HiKOKI power tools employ series motors whose modern design is based on our many years of experience. Unless otherwise indicated in the catalogue, power input (Watt) is based on 110 to 240V.

General precautions

1. Read and follow handling instructions provided with the power tool and comply with all the operating instructions and warnings.
2. Never let children use the power tool.
3. Keep others, especially children, away from the tool.
4. Wear eye protection to protect the eyes.
5. Never touch blades or cutters during operation.
6. Avoid unintentional contact with the power switch when the tool is connected to a power source.
7. To ensure proper function of the tool, DO NOT remove installed covers or screws. DO NOT modify components and parts.
8. Prior to operation, carefully inspect the tool to ensure all the parts are properly functioning.
9. Immediately stop operation if abnormalities are noted.
10. Ensure that motor ventilation opening is kept fully open.
11. Always keep the blades and cutters sharp and clean.
12. Have the power tool inspected at regular intervals by an authorized Service Centre.
13. Maintain the proper care and cleanliness of the power tool.
14. Consult an authorised Service Centre for repair and/or part replacement.
15. DO NOT use the power tool for any other application than those specified in the handling instructions.
16. DO NOT use the tool for work beyond its prescribed capability.
17. To avoid possible electric shock, DO NOT use the power tool in wet areas.
18. Ensure that the applied voltage is the same as that specified on the nameplate.
19. Ensure that electric plug is plugged into a matching receptacle that is properly installed and grounded in accordance with the instruction manual, all applicable local codes, and ordinances, except for double insulated tools.
20. Ensure that the power supply is disconnected after operation.
21. DO NOT lift the power tool with the cord or remove the plug from the receptacle by pulling the cord.
22. Always handle the power tool with care.
23. Proper posture is essential for safe operation.
24. Dress properly and work in proper clothing and shoes.
25. Always keep the work area in good order.
26. When not in use, store the power tool.
27. DO NOT stare into laser beams.

Guarantee

Our primary concern is the convenience and satisfaction of the customer. To this end, each HiKOKI power tool is carefully tested and inspected, and is guaranteed against any defects in workmanship and materials. Defects in workmanship and materials (not attributable to wear and tear, overloading, abusive treatment, unauthorised modification or careless handling) will be repaired or replaced without charge.

Notes

1. Koki Holdings reserves the right to change specifications of parts and accessories of HiKOKI power tools without notice.
2. Specifications, features, accessories and parts such as power input, maximum torque, cutting capacity, length, weight brake, hook, spindle thread, chuck, blade, bore and handle, may vary from country to country.
3. Figures of battery capacity are nominal values.
4. Standard accessories such as battery, charger, grinding wheel, sanding paper, blade, washer, collet chuck, chuck sleeve, side handle, dust collection adapter, protective items, wrench and carrying case, sometimes may vary from country to country. Some standard accessories may be excluded from country to country.
5. Please state required voltage and specifications when you order.
6. Orders are subject to product-availability in each country.
7. Some models in this catalogue are shown with optional accessories and fasteners such as screw, nail, bit, socket, blade, battery and grinding wheel.
8. Actual colours of products may differ from those in printed photos of this catalogue.

Icons

	Double insulation		Blower function
	Electronic constant speed control		Brake
	Electronic soft start control		Brake
	Variable speed		2-speed gear
	Random orbit action		Multi-speed settings
	Orbital cutting action		SDS max shank
	Shock absorbing handle type		SDS plus shank
	Reversible		1/2" square shank
	Dust extracting type		1/4" hex shank
	Spindle lock		28mm hex shank
	Slip clutch		30mm hex shank
	Deep cut		Battery capacity

999091  Carbon brush part number

Battery capacity

1.5Ah Li-ion	2.5Ah Li-ion	2.6Ah Li-ion	3.0Ah Li-ion
4.0Ah Li-ion	5.0Ah Li-ion	6.0Ah Li-ion	

Cases

IM Injection moulded SC Stackable case
BM Blow moulded X No case

Hi5 WARRANTY

Introducing the new HiKOKI Power Tools Hi5 extended 5 year warranty

You can register your cordless brushless power tools for an extra 2 years over the automatic 3 years heavy duty warranty

Available on:

- 18V cordless brushless tools
- 36V (Multi Volt) cordless brushless tools
- Batteries over 4.0Ah, including Multi Volt batteries

Online registration is required within 4 weeks of purchase

HiKOKI service Guarantee

We pride ourselves on the convenience and satisfaction of every customer. To this end, each HiKOKI power tool is carefully tested and inspected, and is guaranteed against any defects in workmanship and materials for a period of one year. Defects in workmanship and materials (not attributable to wear and tear, overloading, abusive treatment, unauthorised modification or careless handling) will be repaired or replaced without charge.

Automatic Heavy Duty 3 Year Warranty

The HiKOKI Heavy Duty Warranty scheme covers cordless and electric power tools. You do not need to register your electric power tools for this. Mains power tools and cordless tool bodies are covered. Batteries of 4.0Ah or more are covered, including Multi Volt batteries.

What does the extended warranty cover?

We undertake to replace or repair any part found to be defective in material or workmanship, within 36 months of delivery to the original purchaser.

What tools are not covered by the warranty?

This scheme is only available to new tools purchased and used in the UK.

Cordless gas nailers and pneumatic nailers are not eligible for the extended warranty. They are covered by the standard 12 month warranty.

Fleet tools are not eligible for the extended warranty. These are covered by a 3 month warranty against manufacturing defects.

What is not covered?

- Gas nailers and pneumatic nailers
- Chargers, accessories and other consumable items
- NiCad and NiMH batteries
- Li-Ion batteries with capacity of 1.5Ah, 2.5Ah & 3.0Ah
- Defects arising from neglect, misuse or accident, except as provided by statute.

How do I get my tool repaired?

Contact your nearest HiKOKI authorised service agent. You can find this on our website or by calling us on 01908 660663. You will need to provide your proof of purchase to the service agent.

hikoki-powertools.co.uk/service

3 YEAR
HEAVY DUTY
WARRANTY

Index.

A place for everything and everything in its place.

123

712650	59	D6SH	47	G12STX	63				
B									
BSL18UA(S)	35	D10VC3	47	G12STX/CD	64				
BSL36A18	37	D10VF	47	G13SE2	65				
BSL36B18	37	D13	48	G13YC2	65				
C									
C7SB3	56	D13VF	47	G18DBAL	24				
C7ST	56	DB3DL2	12	G18DBBAL	24				
C7U3	56	DB10DL	14	G18DSL	24				
C8FSE	58	DH18DBL	20	G18SE4	65				
C8FSHG	58	DH18DSL	20	G23MR	66				
C9U3	57	DH24DVC	20	G23SC4	66				
C10FCE2	58	DH24PX2	50	G23ST	66				
C12RSH2	58	DH26PX	50	G23ST/CD	66				
C18DBAL	28	DH28PC	50	G3612DA	24				
C18DSL	28	DH28PX	50	G3613DB	25				
C3605DYA	27	DH36DMA	21	G3623DA	25				
C3606DA	28	DH36DPA	22	GP2S2	63				
C3607DRA	26	DH36DPB	22	H					
C3610DRA	27	DH40MC	51	H41MB2	53				
CB18DBL	30	DH40MEY	51	H45MEY	52				
CC14SF	67	DH45ME	51	H60MC	52				
CD3605DA	27	DH52ME	51	H60MEY	52				
CE18DSL	31	DN18DSL	12	H65SD3	53				
CG36DA	39	DS18DSDL	13	H90SG	53				
CJ3656DA	38	DS36DAX	13	HSC1	44				
CJ18DSL	29	DV12DD	14	HSC2	44				
CJ18V	48	DV16V	48	HSC3	44				
CC14SF	67	DV18DBFL2	15	HSC4	44				
CD3605DA	27	DV18DBXL	15	K					
CE18DSL	31	DV18DGAL	14	KC18DBFL2	40				
CG36DA	39	DV18DGL	14	KC18DGL	40				
CH3656DA	38	DV18DSDL	14	KC18DKL	40				
CJ18DSL	29	DV18V	48	KC18DPL2	41				
CJ90VST	57	DV20VB2	49	KTL318G	41				
CJ110MV	57	DV20VD	49	KTL318WG	41				
CJ160V	57	DV36DAX	15	KTL318WH2	42				
CL14DSL	30	E							
CL18DSL	30	ET36A	37	KTL436MV	42				
CM12Y	67	F							
CM75EAP	67	KTL618BL2	42	KTL618S2	42				
CN16SA	67	KTL618SJ2	43	KTL818BL2	43				
CN18DSL	31	KTL818SJ2	43	KTL918S2	43				
CR13V2	59	KTN218S	43	M					
CR13VBY	59	G10SR4	63	M8V2	60				
CR13VEY	59	G12SE2	65	M12V2	60				
CR18DBL	29	G12SN2	64	N					
CR18DSL	29	G12SR4	64	NH18DSL	35				
CR36DA	29	G							
CS3630DA	38	NR1890DC	34						
CV18DBL	30	NR90GC2	69						
CV350V	60	NT1850DE	35						
		NT1865DM	35						
		NT1865DMA	35						
		NT50AE2	69						
		NT65GB	69						
		NT65GS	69						
		P							
		P18DSL	31						
		P20SF	61						
		R							
		R18DSL	31						
		RB36DA	39						
		RB40VA	68						
		RP3608DA	33						
		RP3608DB	33						
		S							
		SB8V2	62						
		SB10V2	62						
		SP18VA	62						
		SV12SG	62						
		SV13YA	61						
		SV15YC	61						
		U							
		UB18DA	36						
		UB18DAL	36						
		UB18DJL	36						
		UC18YTS	37						
		UJ1810DA	44						
		UM12VST	68						
		UM16VST	68						
		UR18DSDL	36						
		W							
		W6VB3	54						
		W8VB2	54						
		WF18DSL	12						

Technologies





Reduced vibration and improved operating efficiency.



Stops the motor's output to reduce twisting of the tool body if the tool bit is suddenly overloaded during operation.



Internal double insulation construction with an aluminum die-cast body and a plastic stator holder.



The IP (Ingress Protection) Code rates the degree of protection provided against intrusion of water, dust, body parts such as hands and fingers, accidental contact by mechanical casings and electrical enclosures. The equivalent European standard is EN 60529.

First digit: Solid particle protection

5 - Dust protection

Ingress of dust is not entirely prevented, but it must not enter in sufficient quantity to interfere with the satisfactory operation of the equipment.

Second digit: Liquid ingress protection

4 - Splashing of water

Water splashing against the enclosure from any direction shall have no harmful effect.

6 - Powerful water jets

Water projected in powerful jets (12.5 mm nozzle) against the enclosure from any direction shall have no harmful effects.



One battery pack, two volt classes - the new and innovative Multi-Volt battery packs. The 36 Volt lithium-ion battery packs are compatible with 18 Volt class cordless tools. Smart connecting technology make this possible; the battery pack is able to detect whether it is being used in an 18 Volt or a 36 Volt device, and is capable of supplying both voltages.

Li-ion

Every 10.8, 14, 18 and 36 Volt Lithium-ion battery pack has a built in Electronic Control Circuit. This unique design provides the safest system available to protect and enhance the performance of these batteries. By always keeping the batteries within safe operating conditions, this electronic control ensures that batteries accept many charges than conventional batteries.

Fan-cooled smart battery chargers for 14, 18 and 36V feature a built in fan-cooling system. When a Lithium-ion battery is being charged, cool air is forced up into the battery pack and circulates around the cells. Ensuring that the cells stay cool allows the charger to replenish the battery to a high capacity without causing damage.



HiKOKI original compact controller with fewer wearing parts (no carbon brush, commutator or rotor coil).



Multi Volt series AC power. DC freedom.

A new generation battery system, which has almost the same size and weight as the 18V battery, but it's the technology inside that provides you with the improvements you need. The double voltage contributes to an optimal power, and without the hassle of cords. Also, the Multi Volt is compatible with almost every HiKOKI cordless tool, which means you can easily switch from one power tool to another, regardless the voltage. So you're just a simple click away from maximum performance.



Cordless Brushless **BAUSH LESS** Brushless Motor

Li-Ion nailer series Blending portability with power.

Experience the same power as pneumatic nailers, but without an air hose, power cord or fuel cell. As well as great portability, the HiKOKI Li-ion Nailer series have good gravity balance and an ergonomic soft grip, which makes your job as easy and comfortable as possible. The unique air spring drive system, which is integrated inside the machine, requires no fuel cell, so the maintenance is reduced. The dry-fire lockout prevents unwanted marks or scratches on the material, so you can rely on a great finish.




AC Brushless **BAUSH LESS** Brushless Motor

AC brushless motor series Everlasting efficiency.

Professionals no longer have to worry about losing voltage and power when using a long extension cord. Our AC Brushless Motor series feature an electronic-circuit control that offers continuous and constant power output. With the innovative AC Brushless Motor you'll experience more power and less energy consumption, and lower heat generation on prolonged tasks.



Cordless Tools

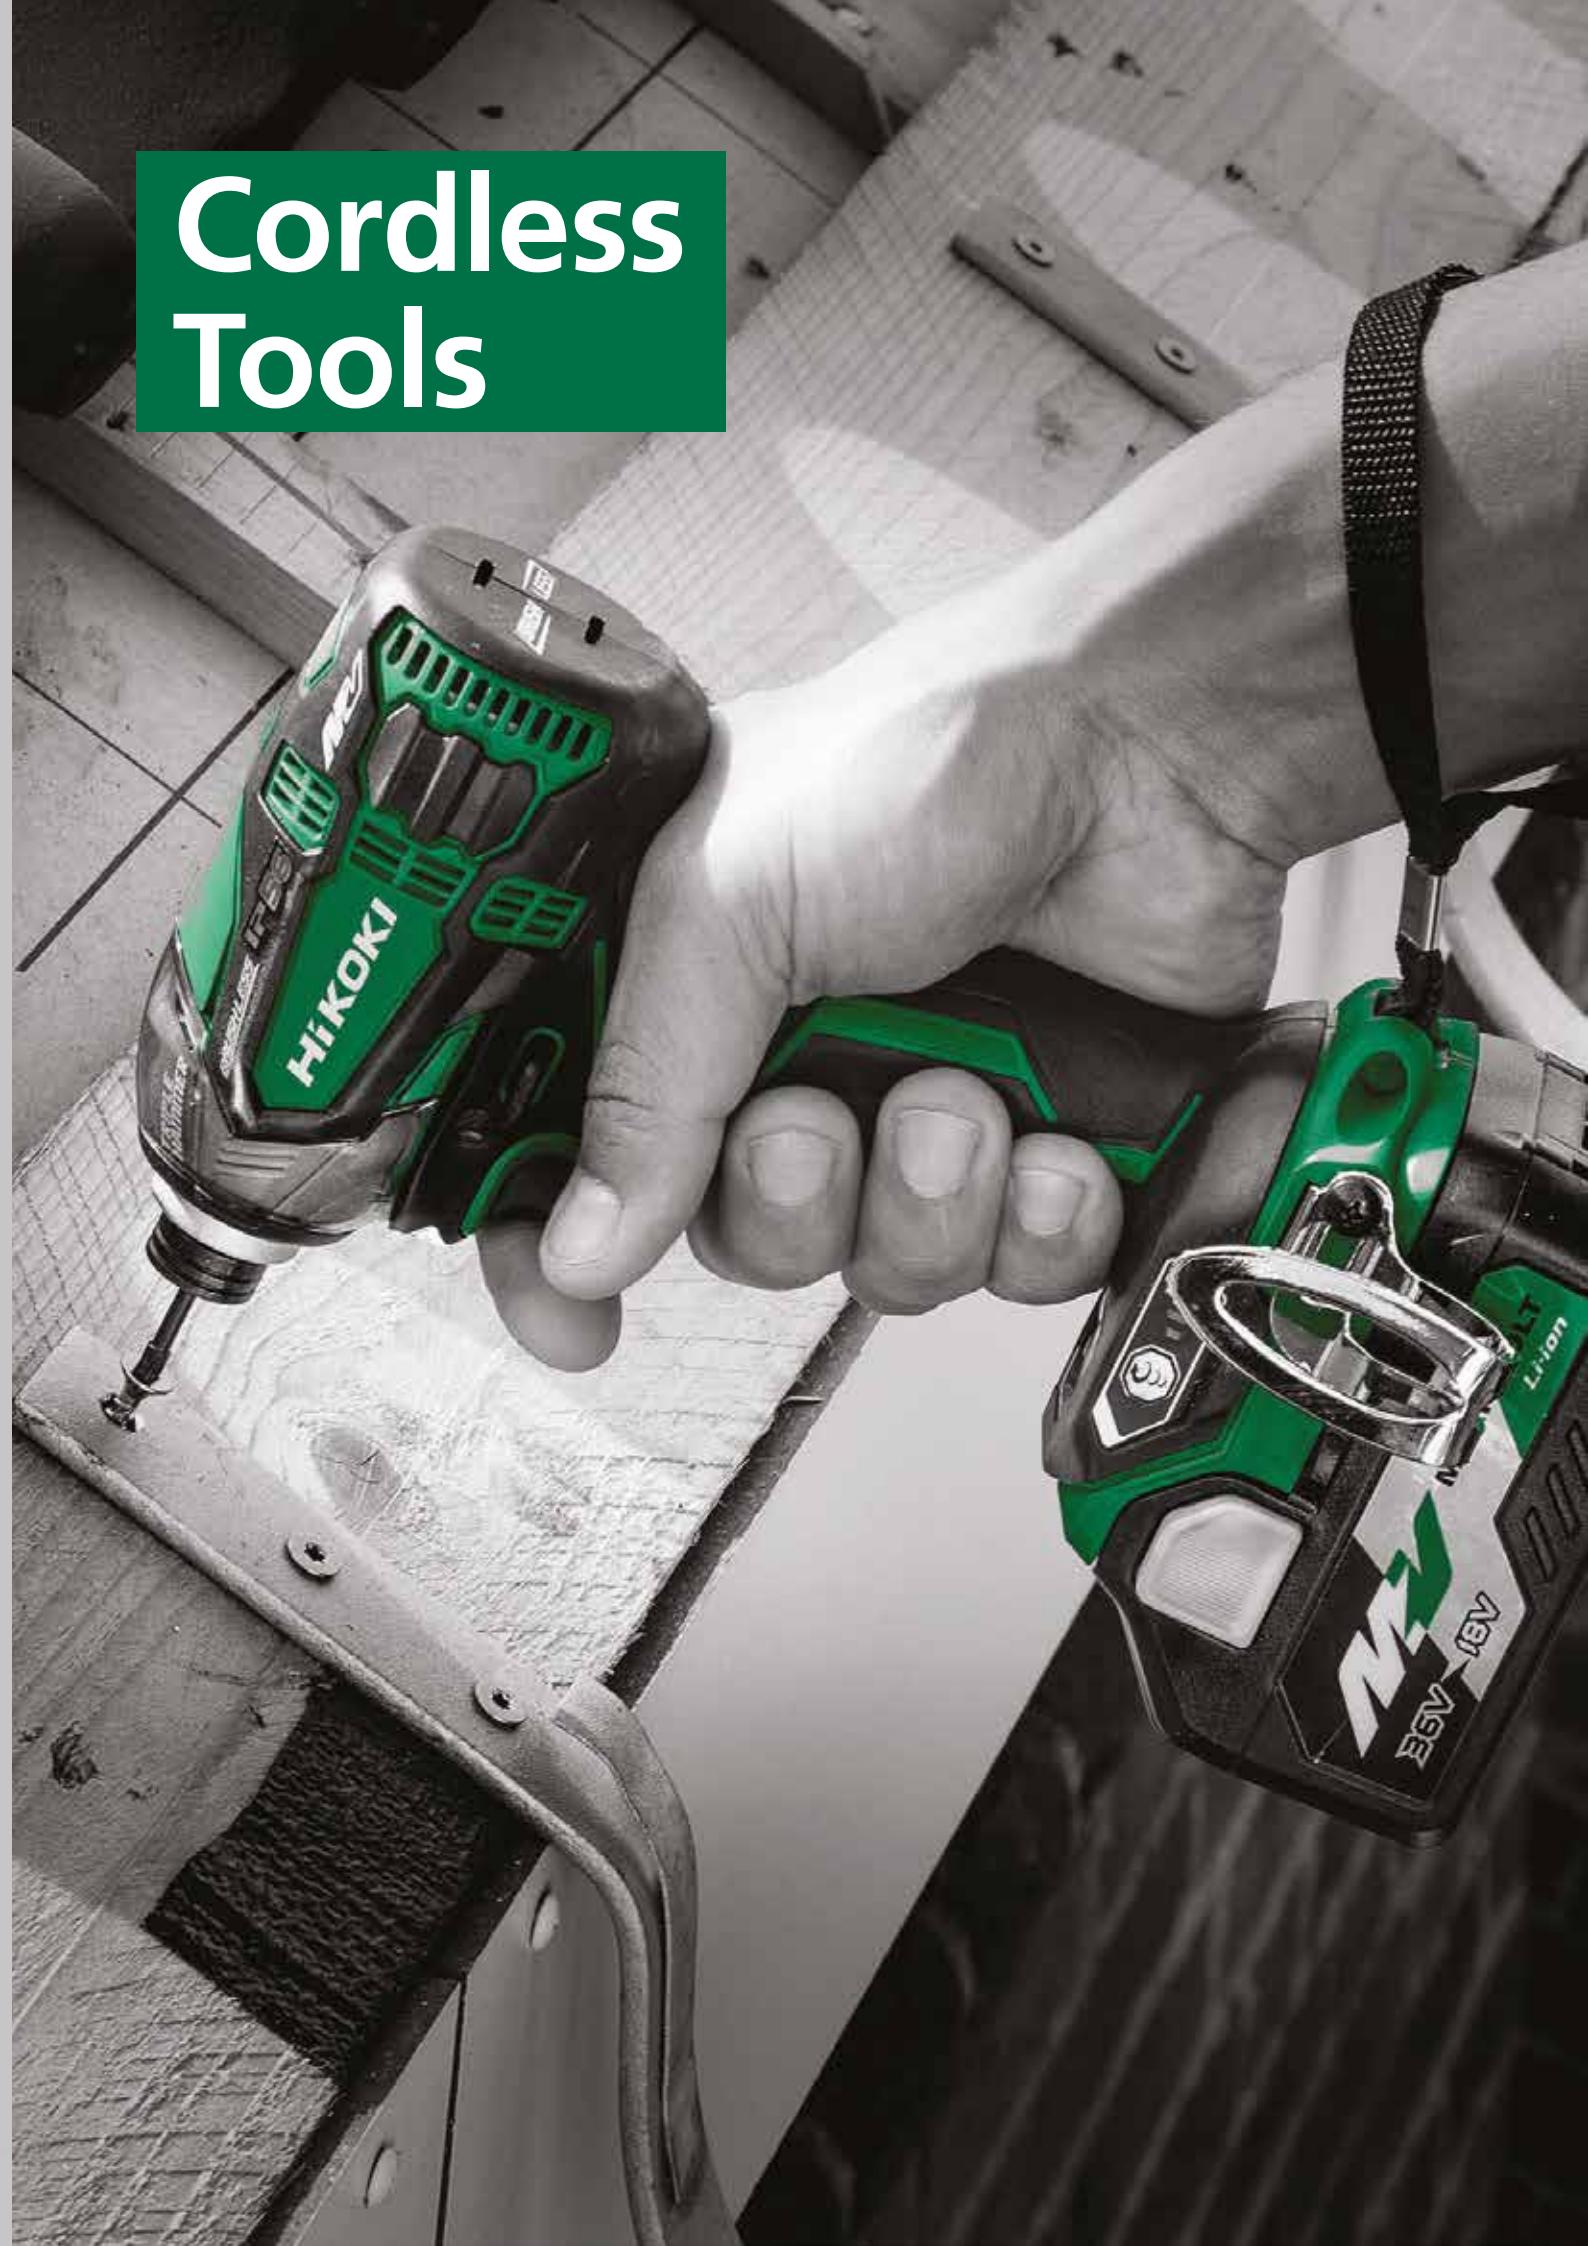

Cordless screwdrivers

DB3DL2

3.6V Screwdriver



Li-ion

Specifications

Drive	6.35mm (1/4") Hex Bit Shank
Capacity : Mild Steel	5mm
Wood Screw (D x L)	3.8 x 38mm
Machine Screw	5mm
Battery Voltage	3.6V
No Load Speed:	
High	600/min
Low	200/min
Torque Setting	0.3 - 2.9Nm
Overall Length: Straight	268mm
Angled	210mm
Weight	0.45kg



WF18DSL

18V Collated Screwdriver



Li-ion

Specifications

Drive	6.35mm (1/4") hex bit shank
Capacity:	
Screw Size	4mm
Screw Length	25 - 41mm
Loading	50 screws
Battery Voltage	18V
No Load Speed	4200/min
Overall Length	379mm
Weight	2.1kg



Variant	Voltage	Contents	Case	GTIN
WF18DSLJJZ	18V	WF18DSL + 2 x 5.0 Ah Li-ion batteries + UC18YRSL charger + 3 x PH2 bits + 3 x surface protectors	BM	4966376319824
WF18DSLJ4Z	18V	WF18DSL + 3 x PH2 bits + 3 x surface protectors	X	5017658062958

Screws not included

DN18DSL

18V Angle Drill



Li-ion

Specifications

Drill Chuck	10mm
Head Height	88mm
Centre Height	23mm
Capacity: Mild Steel	10mm
Soft Wood	28mm
Wood Screw (D x L)	5.1 x 38mm
Battery Voltage	18V
No Load Speed	0-1800/min
Max Torque (hard)	12Nm
Overall Length	326mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
DN18DSLL4Z	18V	DN18DSL (body only)	X	4966376308507

**DS18DSDL**

18V Drill/Driver

Li-ion

Specifications

Drill Chuck	1.5-13mm
Capacity: Mild Steel	13mm
Soft Wood	65mm
Wood Screw (D x L)	8 x 100mm
Machine Screw	6mm
Battery Voltage	18V
No Load Speed: High	0-1600/min
Low	0-350/min
Max Torque Hard	92Nm
Max Torque Soft	46Nm
Torque Setting	2-8Nm
Overall Length	228mm
Weight	2.1kg



Variant	Voltage	Contents	Case	GTIN
DS18DSDLJZ	18V	DS18DSDL + 2 x 5.0Ah Li-ion batteries + UC18YRSL charger	IM	4966376311163
DS18DSDLW4Z	18V	DS18DSDL (body only)	None	4966376311255

DS36DAX

36V Brushless Drill/Driver

MULTIVOLT
Li-ion
BRUSHLESS
Brushless Motor

Specifications

Drill Chuck	1.5 - 13mm
Capacity: Mild Steel	16mm
Soft Wood	102mm
Wood Screw	12 x 100mm
Machine Screw	6mm
Battery Voltage	36V
No Load Speed: High	0 - 2100/min
Low	0 - 500/min
Max Torque: Hard	138Nm
Torque Setting	2 - 8Nm
Overall Length	204mm
Weight	2.7kg



Variant	Voltage	Contents	Case	GTIN
DS36DAXJRZ	36V	DS36DAX + 2 x 5.0Ah Multi Volt Li-ion batteries + UC18YSL3 charger	SC	4966376311538
DS36DAXJ4Z	36V	DS36DAX (body only)	X	4966376311521

Cordless combi drills

DV12DD

12V Peak Combi Drill

NEW

**12V
PEAK**

Li-ion
BRUSHLESS
Brushless Motor



Specifications

Drill Chuck	0.8-10mm
Capacity: Brick	8mm
Mild Steel	10mm
Soft Wood	29mm
Wood Screw	5.8 x 45mm
Battery Voltage	12V peak
No Load Speed: High	0 - 1700/min
Low	0 - 440/min
Impact Rate:	High 0 - 25500/min Low 0 - 6600/min
Max Torque: Hard	38Nm
Torque Setting	0.5-5Nm
Overall Length	162mm
Weight inc battery	1.2kg



DV18DGL

18V Combi Drill

Li-ion



Specifications

Drill Chuck	2.0-13mm keyless
Capacity: Brick	13mm
Mild Steel	13mm
Soft Wood	38mm
Wood Screw	8 x 75mm
(D x L)	
Machine Screw	6mm
Battery Voltage	18V
No Load Speed: High	0-1400/min
Low	0-350/min
Impact Rate: High	0-19600/min
Low	0-4900/min
Max Torque Hard	55Nm
Max Torque Soft	23Nm
Torque Setting	1-6Nm
Overall Length	220mm
Weight	1.7kg



DV18DGAL

18V Combi Drill (4 pole motor)

Li-ion



Specifications

Drill Chuck	13mm keyless
Capacity: Brick	13mm
Mild Steel	13mm
Soft Wood	38mm
Battery Voltage	18V
No Load Speed: High	0-1500/min
Low	0-400/min
Impact Rate	0-21000/min
Max Torque Hard	70Nm
Overall Length	210mm
Weight	1.6kg



DV18DSDL

18V Combi Drill

Li-ion



Specifications

Drill Chuck	1.5-13mm keyless
Capacity: Brick	16mm
Mild Steel	13mm
Soft Wood	65mm
Wood Screw	8 x 100mm
(D x L)	
Machine Screw	6mm
Battery Voltage	18V
No Load Speed	Hi: 0-1800/min Lo: 0-400/min
Impact Rate	Hi: 0-27000/min Lo: 0-6000/min
Max Torque Hard	92Nm
Max Torque Soft	43Nm
Torque Setting	2-8Nm
Overall Length	242mm
Weight	2.2kg



Variant	Voltage	Contents	Case	GTIN
DV18DSDLJJZ	18V	DV18DSDL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	IM	4966376313044
DV18DSDLW4Z	18V	DV18DSDL (body only)	X	4966376313143

DV18DBFL2

18V Brushless Combi Drill



Li-ion
BRUSH
LESS
Brushless Motor

Drill Chuck	13mm keyless
Capacity: Brick	16mm
Mild Steel	13mm
Soft Wood	50mm
Battery Voltage	18V
No Load Speed	Hi: 0-1800/min Lo: 0-400/min
Impact Rate	Hi: 0-27000/min Lo: 0-6000/min
Max Torque Hard	70Nm
Overall Length	189mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
DV18DBFL2JMZ	18V	DV18DBFL2 + 2 x 3.0Ah Li-ion batteries + UC18YKSL charger	IM	4966376312122

DV18DBXL

18V Brushless Combi Drill



Li-ion
BRUSH
LESS
Brushless Motor

Specifications

Drill Chuck	1.5-13mm
Capacity: Brick	16mm
Mild Steel	13mm
Soft Wood	76mm
Wood Screw	10mm x 90mm (D x L)
Machine Screw	6mm
Battery Voltage	18V
No Load Speed :High	0-2100
Low	0-500/min
Impact Rate :High	0-31500/min
Low	0-7500/min
Max Torque Hard	136Nm
Overall Length	204mm
Weight	2.5kg



Variant	Voltage	Contents	Case	GTIN
DV18DBXLJXZ	18V	DV18DBXL + 2 x 6.0Ah Li-ion batteries + UC18YFSL charger	SC	4966376312535
DV18DBXLJ4Z	18V	DV18DBXL (body only)	X	4966376312511

DV36DAX

36V Multi Volt Brushless Combi Drill



MV
MULTI VOLT

Li-ion
BRUSH
LESS
Brushless Motor


Specifications

Drill Chuck	1.5 - 13mm
Capacity: Brick	20mm
Mild Steel	16mm
Soft Wood	102mm
Wood Screw	12 x 100mm
Machine Screw	6mm
Battery Voltage	36V
No Load Speed: High	0 - 2100/min
Low	0 - 500/min
Impact Rate: High	0 - 31500/min
Low	0 - 7500/min
Max Torque: Hard	138Nm
Torque Setting	2 - 8Nm
Overall Length	204mm
Weight	2.7kg



Variant	Voltage	Contents	Case	GTIN
DV36DAXJRZ	36V	DV36DAX + 2 x 2.5Ah Multi Volt batteries + UC18YSL charger	SC	4966376313365
DV36DAXJ4Z	36V	DV36DAX (body only)	X	4966376313358

Impact tools

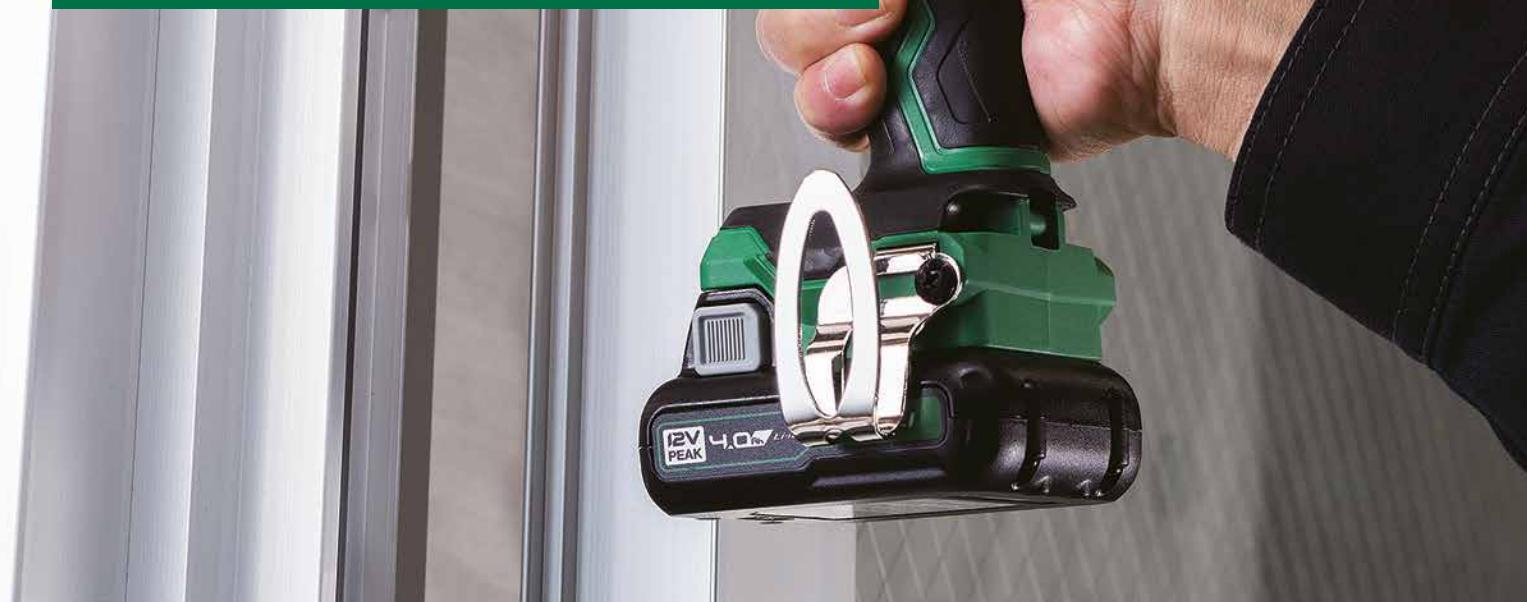

WH12DD

12V Peak Impact Driver

NEW

**12V
PEAK**

Li-ion
BRUSHLESS
Brushless Motor



Specifications

Capacity:

Screw M4-M8

Bolt M5-M15

HT Bolt M5-M12

Drive 6.35mm (1/4") hex

Battery Voltage 12V peak

No Load Speed 0-3200/min

Full Load Impact Rate 0-4000/min

Max Torque 135Nm

Overall Length 134mm

Weight 1.1kg



Variant	Voltage	Contents	Case	GTIN
WH12DDJHZ	12V Peak	WH12DD + 2 x 4.0Ah Multi Volt batteries + UC12SL charger	SC	4966376325450
WH12DDJ5Z	12V Peak	WH12DD (body only)	X	4966376325443

WH18DGL 18V Impact Driver

Li-ion



Variant	Voltage	Contents	Case	GTIN
WH18DGLJ4Z	18V	WH18DGL (body only)	X	4966376321094

Driver bit not included

WH18DBFL2 18V Brushless Impact Driver

Li-ion
**BRUSH
LESS**
Brushless Motor



Variant	Voltage	Contents	Case	GTIN
WH18DBFL2JJZ	18V	WH18DBFL2 + 2 x 5.0Ah Li-ion batteries + UC18YSL3 charger		4966376320936
WH18DBFL2J4Z	18V	WH18DBFL2 (body only)	X	4966376320929

WH18DBDL2 18V Brushless Impact Driver

IP56
Li-ion
**BRUSH
LESS**
Brushless Motor
**TRIPLE
HAMMER**



Variant	Voltage	Contents	Case	GTIN
WH18DBDL2JXZ	18V	WH18DBDL2 + 2 x 6.0Ah Li-ion batteries + UC18YSL3 charger	SC	4966376320806
WH18DBDL2J4Z	18V	WH18DBDL2 (body only)	X	4966376320783

Driver bit not included

Specifications

Capacity:	Bolt	6-14mm
	HT Bolt	6-12mm
	Machine Screw	4-8mm
Drive		6.35mm (1/4") hex bit shank
Tightening Torque		145Nm
Battery Voltage		18V
No Load Speed		0-2400/min
Full Load Impact Rate		0-3200/min
Overall Length		166mm
Weight		1.4kg



WH36DB 36V Brushless Impact Driver

MV
MULTI VOLT

Li-ion **BRUSH
LESS**
Brushless Motor
IP56 **TRIPLE
HAMMER**



Variant	Voltage	Contents	Case	GTIN
WH36DBJRZ	36V	WH36DB + 2 x 2.5Ah Multi Volt Li-ion batteries + UC18YSL3 charger	SC	4966376321544
WH36DBJ4Z	18V	WH36DB (body only)	X	4966376321537

Driver bit not included

Specifications

Capacity:	Bolt	5-16mm
	HT Bolt	5-12mm
	Machine Screw	4-10mm
Drive		6.35mm (1/4") hex bit shank
Tightening Torque		172Nm
Battery Voltage		18V
No Load Speed		0-3100/min
Full Load Impact Rate		0-3200/min
Overall Length		126mm
Weight		1.6kg



Specifications

Capacity:	Bolt	5 - 18mm
	HT Bolt	5 - 14mm
	Machine Screw	4 - 10mm
	Self Drilling Screw	3.5 - 6mm
Drive		6.35mm (1/4") Hex Bit Shank
Tightening Torque		207Nm
Battery Voltage		18V
No Load Speed:		
Power Mode		0 - 2900/min
Normal Mode		0 - 2900/min
Soft Mode		0 - 900/min
Self Drilling Screw Mode		0 - 2900/min
Full Load Impact Rate:		
Power Mode		0 - 4000/min
Normal Mode		0 - 4000/min
Soft Mode		0 - 1900/min
Self Drilling Screw Mode		0 - 2100/min
Overall Length		127mm
Weight		1.6kg

Specifications

Capacity:	Bolt	5 - 18mm
	HT Bolt	5 - 14mm
	Machine Screw	4 - 10mm
	Self Drilling Screw	3.5 - 6mm
Drive		6.35mm (1/4") Hex Bit Shank
Tightening Torque		210Nm
Battery Voltage		36V
No Load Speed:		
Power Mode		0 - 2900/min
Normal Mode		0 - 2900/min
Soft Mode		0 - 900/min
Self Drilling Screw Mode		0 - 2900/min
Impact Rate:		
Power Mode		0 - 4100/min
Normal Mode		0 - 4100/min
Soft Mode		0 - 2000/min
Self Drilling Screw Mode		0 - 2200/min
Overall Length		127mm
Weight		1.6kg

Cordless impact wrenches

WR18DSDL

18V Impact Wrench



Specifications

Capacity: Bolt	10-18mm
HT Bolt	8-14mm
Drive	12.7mm (½") square
Tightening Torque:	
Power mode	255Nm
Save mode	140Nm
Battery Voltage	18V
No Load Speed:	
Power mode	0-2600/min
Save mode	0-2000/min
Full Load Impact Rate	0-3200/min
Overall Length	173mm
Weight	1.7kg



Li-ion

Variant	Voltage	Contents	Case	GTIN
WR18DSDLJJZ	18V	WR18DSDL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	IM	4966376322954
WR18DSDLW4Z	18V	WR18DSDL (body only)	X	4966376323043

WR18DSHL

18V Impact Wrench



Specifications

Capacity: Bolt	12-22mm
HT Bolt	12-16mm
Drive	12.7mm (½") square
Tightening Torque	480Nm
Battery Voltage	18V
No Load Speed	1500/min
Full Load Impact Rate	2000/min
Overall Length	264mm
Weight	3.4kg



Li-ion

Variant	Voltage	Contents	Case	GTIN
WR18DSHLJJZ	18V	WR18DSHL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	IM	4966376323272
WR18DSHLW4Z	18V	WR18DSHL (body only)	X	4966376323388

WR18DBDL2

18V Brushless Impact Wrench



Specifications

Capacity: Bolt	M10 - M20
HT Bolt	M10 - M16
Drive	12.7mm (½") square
Tightening Torque	305Nm
Battery Voltage	18V
No Load Speed:	
High Mode	0 - 2700/min
Medium Mode	0 - 2000/min
Low Mode	0 - 1000/min
Single Mode	0 - 2700/min
Full Load Impact Rate	0 - 3600/min
Overall Length	145mm
Weight	1.8kg



IP56
Li-ion
BRUSHLESS
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
WR18DBDL2JXZ	18V	WR18DBDL2 + 2 x 6.0Ah Li-ion batteries + UC18YSL3 charger	SC	4966376322671
WR18DBDL2W4Z	18V	WR18DBDL2 (body only)	X	4966376322725

WR36DA

36V 19mm (¾") Brushless Impact Wrench

1100Nm Torque

IP56 protection

Multi Volt batteries

Mains equivalent power



Li-ion
BRUSH
LESS
Brushless Motor

IP56

Specifications

Capacity:	Bolt	M12 – M30
	HT Bolt	M10 – M24
Drive		19mm (¾") square
Tightening Torque		1100Nm
Battery Voltage		36V
No Load Speed:		
High Mode		0 – 1500/min
Medium Mode		0 – 1200/min
Low 2 Mode		0 – 900/min
Low 1 Mode		0 – 600/min
Impact Rate:		
High Mode		0 – 2900/min
Medium Mode		0 – 2300/min
Low 2 Mode		0 – 1800/min
Low 1 Mode		0 – 1200/min
Overall Length		221mm
Weight		3.7kg



Variant	Voltage	Contents	Case	GTIN
WR36DAJRZ	36V	WR36DA + 2 x 2.5Ah Multi Volt Li-ion batteries + UC18YSL3 charger	SC	4966376323586
WR36DAJ4Z	36V	WR36DA (body only)	X	4966376323555

WR36DB

36V 12.7mm (½") Brushless Impact Wrench

Specifications

Capacity	Bolt	M12 – M30
	HT Bolt	M10 – M24
Drive		12.7mm (½") square
Tightening Torque		1050Nm
Battery Voltage		36V
No Load Speed:		
High Mode		0 – 1500/min
Medium Mode		0 – 1200/min
Low 2 Mode		0 – 900/min
Low 1 Mode		0 – 600/min
Impact Rate:		
High Mode		0 – 2800/min
Medium Mode		0 – 2300/min
Low 2 Mode		0 – 1800/min
Low 1 Mode		0 – 1200/min
Overall Length		221mm
Weight		3.7kg



Li-ion
BRUSH
LESS
Brushless Motor

IP56



Variant	Voltage	Contents	Case	GTIN
WR36DBJRZ	36V	WR36DB + 2 x 2.5Ah Multi Volt Li-ion batteries + UC18YSL3 charger	SC	4966376323777
WR36DBJ4Z	36V	WR36DB (body only)	X	4966376323746

Cordless hammer drills

Specifications

DH18DSL

18V SDS-Plus Rotary Hammer Drill



Variants

- DH18DSLW4Z body only

Li-ion

Capacity:	Concrete	16mm
	Mild Steel	13mm
	Wood	18mm
Bit Shank	SDS-plus	
Battery Voltage	18V	
No Load Speed	0-750/min	0-1500/min
Impact Rate	0-3100/min	0-6200/min
Impact Energy	1.4 Joules	
Overall Length	276mm	
Weight	2.2kg	



Variant	Voltage	Contents	Case	GTIN
DH18DSLW4Z	18V	DH18DSL (body only)	X	4966376306954

DH18DBL

18V SDS-Plus Rotary Hammer Drill



Li-ion
BRUSHLESS
Brushless Motor

Specifications

Capacity:	Concrete	26mm
	Mild Steel	13mm
	Wood	27mm
Bit Shank	SDS-plus	
Battery Voltage	18V	
No Load Speed	0-1050/min	
Impact Rate	0-3950/min	
Impact Energy	2.6 Joules	
Overall Length	390mm	
Weight	3.7kg	



Variant	Voltage	Contents	Case	GTIN
DH18DBLJPZ	18V	DH18DBL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	SC	4966376306503
DH18DBLJ4Z	18V	DH18DBL (body only)	X	4966376306497

Drill bit not included

DH24DVC

24V SDS-Plus Rotary Hammer Drill



Specifications

Capacity:	Concrete	20mm
	Mild Steel	13mm
	Wood	27mm
Bit Shank	SDS-plus	
Battery Voltage	24V	
No Load Speed	0-1250/min	
Impact Rate	0-5600/min	
Impact Energy	1.7 Joules	
Overall Length	305mm	
Weight	4.1kg	



Variant	Voltage	Contents	Case	GTIN
DH24DVCJKZ	24V	DH24DVC + 2 x 2.0Ah NiMH batteries + UC24SGH charger	BM	4966376307029

Drill bit not included

DH36DMA

36V Brushless SDS-Max
Hammer Drill



MULTI VOLT
Li-ion
BRUSHLESS
Brushless Motor

SDS-Max power

Multi Volt batteries

8.5 Joules impact energy

Variable speed

**Specifications**

Capacity	
Concrete: Drill Bit	40mm
Core Bit	105mm
Bit Shank	SDS max
Battery Voltage	36V
No Load Speed	260 - 590/min
Full Load Impact Rate	1420 - 2860/min
Impact Energy	8.5 Joules
Overall Length	496mm
Weight	6.94kg without battery



Variant	Voltage	Contents	Case	GTIN
DH36DMAJAZ	36V	DH36DMA + 2 x 4.0Ah Multi Volt Li-ion batteries + UC18YSL3 charger + grease pack	BM	4966376325245
DH36DMAJ3Z	36V	DH36DMA (body only)	BM	4966376307630

Drill bit not included

Cordless hammer drills

DH36DPB

36V Brushless SDS-Plus
Hammer Drill
With Dust Extraction



Li-ion
BRUSHLESS
Brushless Motor

Specifications

Capacity: Concrete	20mm
Bit Shank	SDS-plus
Battery Voltage	36V
No Load Speed	0 - 1100/min
Impact Rate	0 - 4300/min
Impact Energy	3.3 Joules
Overall Length	493mm
Weight	5.7kg



Drill bit not included

DH36DPA

36V Brushless
SDS-Plus Hammer Drill



NEW

Li-ion
BRUSHLESS
Brushless Motor



Specifications

Capacity: Concrete	28mm
Steel	13mm
Wood	32mm
Bit Shank	SDS-plus
Battery Voltage	36V
No Load Speed	0 - 1100/min
Impact Rate	0 - 4300/min
Impact Energy	3.3 Joules
Overall Length	351mm
Weight	3.9kg



Drill bit not included

Dust extraction unit

HEPA filter

Multi Volt batteries

Mains equivalent power

Variant	Voltage	Contents	Case	GTIN
DH36DPBJKZ	36V	DH36DPB + 3 x 2.5Ah Multi Volt Li-ion batteries + UC18YSL3 charger	BM	4966376307937
DH36DPBJ3Z	36V	DH36DPB (body only)		4966376307920



Cordless angle grinders

G18DSL

18V Angle Grinder



Specifications

Capacity: Wheel Dia.	115mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Voltage	18V
No Load Speed	9100/min
Overall Length	296mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
G18DSLJJZ	18V	G18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + abrasive wheel + side handle + wrench	BM	4966376314676
G18DSLW4Z	18V	G18DSL + abrasive wheel + side handle + wrench	X	4966376314799

G18DBAL

18V Brushless Angle Grinder



Specifications

Capacity: Wheel Dia.	115mm
Hole Dia.	22.2mm
Spindle Thread	M14 x 2
Voltage	18V
No Load Speed	9000/min
Overall Length	AUTO mode : 5500/min
Weight	326mm
	2.4kg



Variant	Voltage	Contents	Case	GTIN
G18DBALJJZ	18V	G18DBAL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + abrasive wheel + side handle + wrench	BM	4966376313921
G18DBALW4Z	18V	G18DBAL + abrasive wheel + side handle + wrench	X	4966376313945

G18DBBAL

18V Brushless Angle Grinder with Brake



Specifications

Capacity: Wheel Dia.	115mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Voltage	18V
No Load Speed	9000/min
Overall Length	AUTO mode : 5500/min
Weight	326mm
	2.7kg



Variant	Voltage	Contents	GTIN
G18DBBALJJZ	18V	G18DBBAL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + abrasive wheel + side handle + wrench	4966376314027
G18DBBALW4Z	18V	G18DBBAL + abrasive wheel + side handle + wrench	4966376314041

G3612DA

36V Brushless Angle Grinder - Side Switch



Li-ion
BRUSHLESS
Brushless Motor

Specifications

Capacity: Wheel Dia.	115mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Voltage	36V
No Load Speed:	3000 - 9500/min
Transmission Mode	5500/min
AUTO Mode	
Overall Length	358mm
Weight	2.8kg



Variant	Voltage	Contents	Case	GTIN
G3612DAJRZ	36V	G3612DA + 2 x 2.5Ah Multi Volt batteries + UC18YSL3 charger + abrasive wheel + side handle + wrench	SC	4966376314959
G3612DAJ3Z	36V	G3612DA + abrasive wheel + side handle + wrench	SC	4966376314942

NEW**G3623DA**

36V Brushless Angle Grinder



Multi Volt batteries

High performance

Brake system

Auto mode



Li-ion
BRUSH
LESS
Brushless Motor

Specifications

Capacity: Wheel Dia.	230mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Battery Voltage	36V
No Load Speed:	
Transmission Mode	5300/min
AUTO Mode	3200/min
Overall Length	531mm
Weight	4.9kg



Abrasive wheel not included

G3613DB

36V Brushless Angle Grinder - Paddle Switch



Li-ion
BRUSH
LESS
Brushless Motor



Specifications

Capacity: Wheel Dia.	125mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Battery Voltage	36V
No Load Speed:	
Transmission Mode	3000 - 9500/min
AUTO Mode	5500/min
Overall Length	358mm
Weight	2.8kg



Variant	Voltage	Contents	Case	GTIN
G3613DBJRZ	36V	G3613DB + 2 x 2.5Ah Multi Volt batteries + UC18YSL3 charger + abrasive wheel + side handle + wrench	SC	4966376315031
G3613DBW2Z	36V	G3613DB + abrasive wheel + side handle + wrench	SC	4966376315048

NEW

C3607DRA

Multi Volt Slide Compound Mitre Saw



Li-ion
BRUSHLESS
Brushless Motor



Twin belt drive - low noise

Fine bevel adjustment

Laser guide

Fixed pipe slide action

Specifications

Blade	185mm x 40T
Bore	20mm
(H x W) Cross Cut: 0°	58 x 310mm
Mitre Cut:	45° L/R
Mitre Cut:	45° L
Bevel Cut:	45° R
Bevel Cut:	45° L
Mitre Angle:	Right 0-57°
	Left 0-45°
Bevel Angle:	Left 0-45°
	Right 0-45°
Voltage	36V
No Load Speed	4000/min
Dimensions (w/o dust bag)	830 x 780 x 484mm
Weight	15.4kg

Variant	Voltage	Contents	Case	GTIN
C3607DRAJGZ	36V	C3607DRA + 2 x 2.5Ah Multi Volt batteries + UC18YSL3 charger + dust bag + sub table assy + holders + wrench	X	4966376324125

C3610DRA

Multi Volt Slide Compound Mitre Saw



NEW



Specifications

Blade	255mm
Bore	30mm
(H x W) Cross Cut: 0°	89 x 292mm
Mitre Cut:	45° L/R
Bevel Cut:	45° L
Bevel Cut:	45° R
Mitre Angle: Right	0-60°
Mitre Angle: Left	0-55°
Bevel Angle: Left	0-48°
Bevel Angle: Right	0-48°
Voltage	36V
No Load Speed	4000/min
Dimensions	778 x 792 x 686mm
Weight	20.6kg

**C3605DYA**

125mm Multi Volt Circular saw



NEW



Specifications

Blade	125mm
Bore	20mm
Cutting Capacity:	
0°	47mm
45°	30mm
Voltage	36V
No Load Speed:	
Power	5000/min
Silent	2600/min
Dimensions	277 x 193 x 236mm
Weight	2.8kg



Bluetooth

CD3605DA

125mm Multi Volt Metal Cutting Saw



NEW



Specifications

Blade	125mm
Bore	20mm
Cutting Capacity	46mm
Voltage	36V
No Load Speed:	
Power	3600/min
Silent	2400/min
Dimensions	286 x 193 x 236mm
Weight	2.8kg



Variant	Voltage	Contents	GTIN
C3605DAJ3Z	36V	C3605DA (body only)	4966376328352

Cordless saws

C18DSL

18V 165mm Circular Saw



Li-ion

Specifications

Capacity: Blade Dia	165mm
Bore	30mm
Max Cut Depth	90°: 57mm 45°: 40mm
Voltage	18V
No Load Speed	3400/min
Overall Length	365mm (14-3/8")
Weight	3.2kg (7.1lbs.)



C18DBAL

18V 185mm Circular Saw



Li-ion
BRUSHLESS
Brushless Motor

Specifications

Capacity: Blade Dia.	165mm
Bore	20mm
Max Cut Depth	90°: 66mm 45°: 45mm
Voltage	18V
No Load Speed	4100/min
Power Mode	2500/min
Silent Mode	294mm with BSL1850
Overall Length	3.2kg with BSL1850
Weight	



C3606DA

18V 165mm Circular Saw



Li-ion
BRUSHLESS
Brushless Motor

Specifications

Capacity: Blade Dia.	165mm
Bore	20mm
Max Cut Depth:	
90°	66mm
45°	45mm
Voltage	36V
No Load Speed:	
Power Mode	4300/min
Silent Mode	2000/min
Overall Length	292mm
Weight	3.4kg



C3607DA

18V 185mm Circular Saw



Li-ion
BRUSHLESS
Brushless Motor

Specifications

Capacity: Blade Dia.	185mm
Bore	30mm
Max Cut Depth:	
90°	62mm
45°	47.5mm
Voltage	36V
No Load Speed:	
Power Mode	4300/min
Silent Mode	2000/min
Overall Length	335mm
Weight	3.4kg



Variant	Voltage	Contents	Case	GTIN
C3607DAJRZ	36V	C3607DA + 2 x 2.5Ah Multi Volt batteries + UC18YSL3 charger	SC	4966376313631
C3607DAJ3Z	36V	C3607DA (body only)	SC	4966376313600

CR18DSL

18V Reciprocating Saw


Li-ion
 BRUSH
 LESS
Brushless Motor

Specifications

Capacity:

Pipe	90mm
Steel Plate	10mm
Wood	90mm
Voltage	18V
Length of Stroke	28mm
No Load Speed	0 - 2100/min
Overall Length	434mm
Weight	3.4kg



999068

CR18DBL

18V Brushless Reciprocating Saw


Li-ion
 BRUSH
 LESS
Brushless Motor

Specifications

Capacity:

Mild Steel Pipe	130mm
PVC Pipe	130mm
Wood	120mm
Mild Steel Plate	19mm
Voltage	18V
Length of Stroke	32mm
No Load Speed	0 - 2500/min
Overall Length	435mm
Weight	3.4kg with BSL1850

**CR36DA**

36V Brushless Reciprocating Saw

MULTI VOLT
NEW
Li-ion
 BRUSH
 LESS
UVP
USER VIBRATION PROTECTION


Specifications

Capacity:

Pipe	130mm
Wood	300mm
Mild Steel Plate	19mm
Voltage	36V
Length of Stroke	32mm
No Load Speed	0-1700/min
	0-2000/min
	0-2500/min
	0-3000/min
Overall Length	457mm
Weight	4.5kg with BSL36A18

**CJ18DSL**

18V Jigsaw

Li-ion


Specifications

Capacity:

Wood	135mm
Mild Steel Plate	10mm
Min Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Voltage	18V
Length of Stroke	26mm
No-Load Speed(stroke)	0-2400/min
Overall Length	277mm
Weight	2.4kg



Variant	Voltage	Contents	Case	GTIN
CJ18DSLJJZ	18V	CJ18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger	BM	4966376303953
CJ18DSLW4Z	18V	CJ18DSL (body only)	X	4966376304066

Cordless cutting

CV18DBL

18V Multi Tool

Li-ion
BRUSHLESS
Brushless Motor



Specifications

Battery Voltage	18V
Oscillation Frequency:	
Standard Mode (Dial 1-5)	6000 - 20000/min
AUTO Mode (Dial A)	15000 - 20000/min
Oscillation Angle	3.2°
Overall Length	307 mm
Weight	2.0kg with BSL1850



CB18DBL

18V Bandsaw

Li-ion
BRUSHLESS
Brushless Motor



Specifications

Max Cut Capacity: Round Pipe	83mm
Square Pipe (W x H)	80 x 80mm
Blade Speed: Standard Mode (1-5)	1.3-3.2m/s (80-195m/min)
Auto Mode (without load)	2.0m/s (120m/min)
Auto Mode (with load)	3.2m/s (195m/min)
Band Saw Blade Dimensions (L x W x T)	900 x 12.5 x 0.5mm
Dimensions (L x W x H)	413 x 173 x 266mm
Weight	3.6kg with BSL1850



CL14DSL

14.4V Stud Cutter

Li-ion



Specifications

Capacity:	
Threaded Stud Size	W3/8, W5/16, M10, M8, M6
Battery Voltage	14.4V
No Load Speed	30/min
Overall Length	283mm
Weight	3.2kg



CL18DSL

18V Stud Cutter

Li-ion



Specifications

Capacity:	
Threaded Stud Size	W3/8, W5/16, M10, M8, M6
Battery Voltage	18V
No Load Speed	30/min
Overall Length	283mm
Weight	3.2kg



Li-ion

Variant	Voltage	Contents	Case	GTIN
CL18DSLJZ	18V	CL18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + M10 cutter set + M10 trimmer	BM	4966376304325

P18DSL
18V Planer



Li-ion

Specifications

Capacity: Cutting Width	82mm
Max Cutting Depth	2mm
Battery Voltage	18V
No Load Speed	16000/min
Overall Length	326mm
Weight	3.2kg

5.0Ah *Li-ion* 999017

Variant	Voltage	Contents	Case	GTIN
P18DSLJJZ	18V	P18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + blade setting gauge + guide + wrench	BM	4966376316830
P18DSLW4Z	18V	P18DSL + blade setting gauge + guide + wrench	X	4966376317004

CE18DSL
18V Shear



Li-ion

Specifications

Voltage	18V
Capacity:	
Steel	1.6mm (16ga.)
Stainless	1.2mm (18ga.)
Aluminium	
Plate	2.3mm (13ga.)
Min. Cutting Radius	25mm
No Load Speed	5300/min
Overall Length	295mm with BSL1850
Weight	2.2kg with BSL1850

5.0Ah *Li-ion* 999054

Variant	Voltage	Contents	Case	GTIN
CE18DSLJPZ	18V	CE18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + blade set + thickness gauge	SC	4966376302451

CN18DSL
18V Nibbler



Li-ion

Specifications

Voltage	18V
Capacity:	
Steel	1.6mm (16ga.)
Stainless	1.2mm (18ga.)
Aluminium	
Plate	2.3mm (13ga.)
Min. Cutting Radius	40mm
No Load Speed	2500/min
Overall Length	295mm with BSL1850
Weight*2	2.1kg with BSL1850
Standard Accessories*3	

5.0Ah *Li-ion* 999054

Variant	Voltage	Contents	Case	GTIN
CN18DSLJPZ	18V	CN18DSL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger	SC	4966376304455

R18DSL
18V Wet/Dry Vacuum



Specifications

Battery Voltage	18V
Dust box Capacity	670ml
Overall Length	430mm
Weight	1.5kg

Variant	Voltage	Contents	Case	GTIN
R18DSLW4Z	18V	R18DSL + brush nozzle + crevice nozzle	X	4966376317349

Dust Extraction



Cordless & dustless
Easy pairing with a cordless tool

Bluetooth®



Cordless Cleaner
RP3608DB

Cordless
Circular Saw
C3605DYA

All new Bluetooth® connectivity allows the cordless cleaner to automatically turn on or off when the connected tool starts or stops

RP3608DB

Multi Volt Cleaner with Bluetooth



NEW



Specifications

Usage	Dry only
Voltage	36V x 2
Bluetooth	Yes
Communication Distance	10m
Maximum Airflow	3.5m³/min
Maximum Vacuum	20.1kPa
Continuous Operating Time (2 x BSL36B18):	
Turbo	9 mins
Standard	33 mins
Eco	75 mins
Effective Dust Volume	8.0 litres
Dust Class	L
Hose Length	5.0m
Dimensions	331 x 369 x 382mm
Weight (inc battery)	10.5kg

Li-ion
BRUSH
LESS
Brushless Motor

Bluetooth

RP3608DA

Multi Volt Cleaner



NEW



Specifications

Usage	Wet/dry
Voltage	36V x 2
Bluetooth	No
Maximum Airflow	3.5m³/min
Maximum Vacuum	20.1kPa
Continuous Operating Time (2 x BSL36B18):	
Turbo	14 mins
Standard	52 mins
Eco	120 mins
Effective Dust Volume:	
Dry	8.0 litres
Wet	6.0 litres
Hose Length	1.5m
Dimensions	331 x 369 x 382mm
Weight (inc battery)	10.9kg

Li-ion
BRUSH
LESS
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
RP3608DAW4Z	36V	RP3608DA + hose + pipe + floor cleaning accessory + 10 plastic bags	X	4966376324668

Cordless nailers



NR1890DC

18V Brushless Framing Nailer

Brushless motor

No fuel cells required

No air line or compressor

High driving power



5.0Ah
Li-ion

Specifications

Driving System	Air Spring
Nail Length	50mm to 90mm
Driving Speed	1.5 to 2nails/sec. (Intermittent)
Loading Capacity	47 nails
Firing Mode	Full sequential / Contact
Battery Voltage	18V
Dimensions (H x L x W)	342 x 309 x 127mm
Weight (Battery included)	4.8kg with BSL1850

Li-ion
BRUSHLESS
Brushless Motor

Variant	Voltage	Contents	Case	GTIN
NR1890DCJPZ	18V	NR1890DC + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger + safety glasses	SC	4966376327829
NR1890DCJ6Z	18V	NR1890DC + safety glasses	SC	4966376327812

NT1850DE

18V Brushless 18G Brad Nailer

Li-ion**BRUSH
LESS**
Brushless Motor**Specifications**

Driving System	Air Spring
Nail Length	16mm to 50mm
Driving Speed	3nails/sec. (Intermittent)
Loading Capacity	100nails (1 strip)
Firing Mode	Full sequential/ Contact (Selectable)
Battery Voltage	18V
Dimension (H x L x W)	323 x 298 x 104mm
Weight (Battery included)	3.3kg with BSL1830C

3.0Ah
Li-ion**NT1865DM**

18V Brushless 16G Finish Nailer

Li-ion
**BRUSH
LESS**
Brushless Motor**Specifications**

Driving System	Air Spring
Nail Length	25mm to 65mm
Driving Speed	3nails/sec. (Intermittent)
Loading Capacity	100nails (2 strips)
Firing Mode*6	Full sequential/ Contact (Selectable)
Battery Voltage	18V
Dimension (H x L x W)	315 x 298 x 104mm
Weight (Battery included)	3.4kg with BSL1830C

3.0Ah
Li-ion**NT1865DMA**

18V Brushless 15G Finish Nailer

Li-ion
**BRUSH
LESS**
Brushless Motor**Specifications**

Driving System	Air Spring
Nail Length	32mm to 65mm
Driving Speed	3nails/sec. (Intermittent)
Loading Capacity	100nails (1 strip)
Firing Mode*6	Full sequential/ Contact (Selectable)
Battery Voltage	18V
Dimension (H x L x W)	344 x 300 x 104mm
Weight (Battery included)*	3.5kg with BSL1830C

3.0Ah
Li-ion**NH18DSL**

18V Automatic Nailer

NEW**Specifications**

Nail Length	25 - 90mm*
Nail Diameter	1.7 - 4.1mm*
Nail Head Diameter	4.4 - 8.7mm*
Impact Rate	4000/min
Driving Time	1.5 seconds*
Battery Voltage	18V
Head Height	113mm
Centre Height	17mm
Length	285mm
Weight (Battery included)	1.3kg with BSL1815

* Material: SPF

Variant	Voltage	Contents	Case	GTIN
NH18DSLW4Z	18V	NH18DSL (body only)	X	4966376264391

Cordless radio & torches

UR18DSDL

DAB Site Radio



DAB Digital Audio Broadcasting

Bluetooth®

Variant	Voltage	Contents	Case	GTIN
UR18DSDLJ4Z	18V	UR18DSDL + mains adapter	X	4966376319626

Specifications

Frequency Band:	DAB/DAB+	174.928 to 239.200MHz (BAND III)
FM	87.5 to 108MHz	
AM	522 to 1629KHz	
Antenna:	DAB/FM	Rubber antenna
	AM	Ferrite bar antenna (built-in)
Bluetooth®		Bluetooth Ver.4.0
		Bluetooth profile: A2DP (Advanced Audio Distribution Profile) / AVRCP (Audio Video Remote Control Profile)
		Send/Receive sensitivity: Class2
Speaker (diameter)	90mm (8Ω) x 2	
Input Terminal	AUX-IN (3.5mm)	
Output Terminal	USB charging jack (5V 1A)	
Max Available Output	AC: 5W x 2, 14.4V: 6W x 2, 18V: 7W x 2	
Power Supply:	Slide Battery	DC 14.4V, 18V
	Household Power Supply	Using provided AC adapter
	Backup Batteries	DC 3.0V, Two AA Batteries
Dimensions (L x W x H)	405 x 312 x 265mm (with antenna retracted)	
Weight	4.0kg without battery	

UB18DA

LED Searchlight

NEW

LED

IP54



Variant	Voltage	Contents	Case	GTIN
UB18DAW4Z	18V	UB18DA (body only)	X	4966376328734

Specifications

Battery Voltage	14.4V/18V/Multi Volt
Maximum Output	2500 lumens
Lighting Mode:	
Spot + Wide	2500 lumens
Spot	1100 lumens
Wide	1300 lumens
Continuous Run Time*:	
Spot + Wide	3.0 hours
Spot	6.0 hours
Wide	5.8 hours
Wide (Eco)	22.0 hours
Dimensions (L x W x H)	203 x 280 x 204mm
Weight	1.85kg

*using BSL1860

UB18DJL

LED Torch/ Work Light

LED



Specifications

Battery Voltage	14.4V/18V/Multi Volt
Torchlight:	
Brightness/	6000lx/1m
Measured distance	
LED lamp	1 x LED 3W
Worklight:	
Brightness/	High: 110lx/1m
Measured distance	Medium: 55lx/1m, Low 27lx/1m
LED lamp	12 x LED 0.5W
Dimensions (L x W x H)	205 x 78 x 108mm without battery
Weight	0.3kg without battery

Variant	Voltage	Contents	Case	GTIN
UB18DJLLOZ	18V	UB18DJL (body only)	X	4966376317745

UB18DAL

Angle Head Torch



Specifications

For 18V slide Lithium-ion batteries	
Adjustable head	
Batteries not included	

Variant	Voltage	Contents	Case	GTIN
UB18DALLOZ	18V	UB18DAL (body only)	X	4966376317585

UC18YTS_L

4 port charger

NEW



Variant	Voltage	Contents	Case	GTIN
UC18YTSLJ0Z	18V/36V	UC18YTS _L	X	4966376330904

Specifications

Charge Time per Battery (Rapid Charge):	
6.0Ah	38 mins
5.0Ah	32 mins
3.0Ah	20 mins
Charge Time Per Set of 4 Batteries (Simultaneous charge):	
6.0Ah	152 mins
5.0Ah	128 mins
3.0Ah	80 mins
USB output	2 sockets, 2A total
AC Output	8A
Operating Temperature	-10°C to 50°C

ET36A

Multi Volt Mains Adapter

NEW



Specifications

Compatible Tool Range	Multi Volt series
Input Supply	AC 230V
Output Voltage	36V
Peak Output Wattage	2kW
Cord Length	6.0m
Dimensions:	
Adapter	83 x 134 x 75mm
PFC Box	100 x 185 x 78mm
Weight (exc. cord):	
Adapter	0.8kg
PFC Box	1.2kg

BSL36A18

Multi Volt Battery



Specifications

Voltage & Capacity	36V - 2.5Ah / 18V - 5.0Ah
Battery Level Indicator	4 stage
Cooling System	Yes
Dimensions (L x H x W)	116 x 69 x 76mm
Charging Time	Approx. 32 min*
Compatible Products:	18V
	36V
Compatible Chargers	All existing 18V slide-type tools MULTI VOLT 36V tools All chargers for 14.4V - 36V slide-type Lithium-ion batteries

Variant	Voltage	Contents	Case	GTIN
BSL36A18J0Z	18V/36V	1 x BSL36A18	X	4549115156203

BSL36B18

Multi Volt Battery



Specifications

Voltage & Capacity	36V - 4.0Ah / 18V - 8.0Ah
Battery Level Indicator	4 stage
Cooling System	Yes
Dimensions (L x H x W)	134 x 75 x 83mm
Charging Time	Approx. 52 min
Compatible Products:	18V
	36V
Compatible Chargers	All chargers for 14.4V - 36V slide-type Lithium-ion batteries

Variant	Voltage	Contents	Case	GTIN
BSL36B18J0Z	18V/36V	1 x BSL36B18	X	4549115160651

CH3656DA
36V Hedgetrimmer



Multi Volt Battery

4 speed settings

Triple edged blade

Up to 62 mins run time

Li-ion



Specifications

Battery Voltage	36V
Blade:	
Length	620mm
Effective	560mm
Blade Pitch	35mm
Overall Length	1088mm
Weight	4.1kg with BSL36A18



Variant	Voltage	Contents	Case	GTIN
CH3656DAJLZ	18V	CH3656 + 1 x Multi Volt battery + UC18YSL3 charger + blade cover	X	4966376303465
CH3656DAJ4Z	18V	CH3656 + blade cover	X	4966376303458

CS3630DA

36V Top Handle Chainsaw



Specifications

Battery Voltage	36V
Guide Bar Length	300mm
Chain Speed	8.3m/s
Type of Guide Bar	P012-50CR
Chain Pitch	9.5mm
Overall Length	599mm
Weight	4.3 kg with BSL36A18

Li-ion



NOTE: TOP HANDLE CHAINSAWS ARE FOR USE BY TRAINED ARBORISTS ONLY

Variant	Voltage	Contents	Case	GTIN
CS3630DAJLZ	18V	CS3630DA + 1 x Multi Volt battery + UC18YSL3 charger + bar cover + chain oil + wrench	X	4966376305384
CS3630DAJ4Z	18V	CS3630DA + bar cover + chain oil + wrench	X	4966376305377

Specifications

CG36DA (loop handle)

36V Grass Trimmer



Battery Voltage	36V
Cutting Capacity Dia.	310mm
No Load Speed of	
Trimmer	5800 - 7000/min
Overall Length	1885mm
Weight	5.6kg with BSL36A18



Variant	Voltage	Contents	Case	GTIN
CG36DAJDZ	18V	CG36DA + 1 x Multi Volt battery + UC18YSL3 charger + harness + safety glasses + wrenches	X	4966376302864
CG36DAJ4Z	18V	CG36DA + harness + safety glasses + wrenches	X	4966376302840

CG36DA (bike handle)

36V Grass Trimmer



Specifications

Battery Voltage	36V
Cutting Capacity Dia.	310mm (12")
No Load Speed of	
Trimmer	5800 - 7000/min
Overall Length	1885mm (74")
Weight	5.8kg with BSL36A18



Variant	Voltage	Contents	Case	GTIN
CG36DAJEZ	18V	CG36DA + 1 x Multi Volt battery + UC18YSL3 charger + harness + safety glasses + wrenches	X	4966376302871
CG36DAJ5Z	18V	CG36DA + harness + safety glasses + wrenches	X	4966376302857

RB36DA

36V Blower



Specifications

Battery Voltage	36V
Air Volume	680m³/h (800m³/h in turbo mode)
Air Velocity	45m/s (53m/s in turbo mode)
Overall Length	940mm
Weight	3.5kg with BSL36A18



Variant	Voltage	Contents	Case	GTIN
RB36DAJLZ	18V	RB36DA + 1 x Multi Volt battery + UC18YSL3 charger + nozzle	X	4966376317493
RB36DAJ4Z	18V	RB36DA + nozzle	X	4966376317486

Cordless kits

KC18DGL

18V 2 pce Cordless Kit



Li-ion

Specifications

DV18DGL combi drill
WH18DGL impact driver
Injection moulded case

Variant	Voltage	Contents	Case	GTIN
KC18DGLJEZ	18V	DV18DGL + WH18DGL + 2 x 5.0Ah Li-Ion batteries + UC18YKSL charger	IM	4966376315499

Driver bits not included

KC18DBFL2

18V 2 pce Brushless Cordless Kit



Li-ion
BRUSHLESS
Brushless Motor

Specifications

DV18DBFL2 combi drill
WH18DBFL2 impact driver

Variant	Voltage	Contents	Case	GTIN
KC18DBFL2JAZ	18V	DV18DBFL2 + WH18DBFL2 + 2 x 5.0Ah batteries + UC18YFSL charger	IM	4966376315291
KC18DBFL2JCZ	18V	DV18DBFL2 + WH18DBFL2 + 2 x 3.0Ah batteries + UC18YFSL charger	SC	4966376315307

Driver bits not included

KC18DKL

18V 2 pce Cordless Kit



Li-ion

Specifications

DV18DSDL combi drill
WH18DSAL impact driver

Variant	Voltage	Contents	Case	GTIN
KC18DKLJZ	18V	DV18DSDL + WH18DSAL + 2 x 5.0Ah Li-Ion batteries + UC18YFSL charger	IM	4966376315581

Driver bits not included

KC18DPL2

18V 2 pce Brushless Cordless Kit



Li-ion
BRUSHLESS
Brushless Motor

Specifications

DV18DBXL combi drill
WH18DBDL2 impact driver

Variant	Voltage	Contents	Case	GTIN
KC18DPL2JAZ	18V	DV18DBXL + WH18DBDL2 + 2 x 6.0Ah Li-Ion batteries + UC18YSL3 charger	SC	5017658062590

Driver bits not included

KC18DPL2

18V 2 pce Brushless Cordless Kit

Li-ion
BRUSH
LESS
Brushless Motor



Specifications

DV18DBXL combi drill
WR18DBDL2 impact wrench

Variant	Voltage	Contents	Case	GTIN
KC18DPL2JBZ	18V	DV18DBXL + WR18DBDL2 + 2 x 6.0Ah Li-Ion batteries + UC18YSL3 charger	SC	5017658062606

Socket not included

KTL318G

18V 3 pce Cordless Kit

Li-ion



Specifications

DV18DGL combi drill
G18DSL angle grinder
UB18DAL torch

Variant	Voltage	Contents	Case	GTIN
KTL318GJMZ	18V	DV18DGL + G18DSL + UB18DAL + 2 x 3.0Ah Li-ion batteries + UC18YFSL charger	IM (drill)	5017658062613

Socket not included

KTL318WG

3 pce Cordless Kit

Li-ion



Specifications

WR18DSDL impact wrench
G18DSL angle grinder
UB18DAL torch

Variant	Voltage	Contents	GTIN
KTL318WGJZ	18V	WH18DSDL + G18DSL + UB18DAL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	5017658062620

Socket not included

Cordless kits

KTL318WH2

3 pce Cordless Kit

Li-ion



Specifications

DV18DSDL combi drill
WH18DSAL impact driver
WH18DGL impact driver

Variant	Voltage	Contents	GTIN
KTL318WH2	18V	DV18DSDL + WH18DSAL + WH18DGL + 2 x 5.0Ah Li-ion batteries + UC18YFSL charger	5017658062637

Driver bits not included

KTL436MV

4 pce Multi Volt Cordless Kit



NEW



Specifications

DV36DAX combi drill
WH36DB IP56 impact driver
G3613DB angle grinder
CR36DA reciprocating saw

Variant	Voltage	Contents	Case	GTIN
KTL436MV	18V	CR36DA + DV36DAX + WH36DB + G3613DB + 2 X Multi Volt batteries + UC18YSL3 charger	SC (drill)	5017658062637

Driver bits not included

KTL618BL2

6 pce Brushless Cordless Kit

Li-ion
BRUSHLESS
Brushless Motor



Specifications

DV18DBXL combi drill
WH18DBDL2 impact driver
C18DBAL circular saw
G18DBAL angle grinder
CV18DBL multi tool
UB18DJL torch/work light

Variant	Voltage	Contents	GTIN
KTL618BL2	18V	DV18DBXL + WH18DBDL2 + C18DBAL + G18DBAL + CV18DBL + UB18DJL + 2 x 6.0Ah Li-ion batteries + UC18YSL3 charger + tool bag	5017658062644

Driver bits not included

KTL618S2

6 pce Cordless Kit

Li-ion



Specifications

DV18DSDL combi drill
WH18DSAL impact driver
C18DSL circular saw
CR18DSL reciprocating saw
G18DSL angle grinder
UB18DJL torch/work light

Variant	Voltage	Contents	GTIN
KTL618S2JJ3Z	18V	DV18DSDL + WH18DSAL + C18DSL + CR18DSL + G18DSL + UB18DJL + 3 x 5.0Ah Li-ion batteries + UC18YFSL charger + tool bag	5017658062651

Driver bits not included

Specifications

DV18DSDL combi drill
WH18DSAL impact driver
C18DSL circular saw
CJ18DSL jigsaw
G18DSL angle grinder
UB18DJL torch/work light

KTL618SJ2

6 pce Cordless Kit



Li-ion

Variant	Voltage	Contents	GTIN
KTL618SJ2JJ3Z	18V	DV18DSDL + WH18DSAL + C18DSL + CJ18DSL + G18DSL + UB18DJL + 3 x 5.0Ah Li-ion batteries + UC18YFSL charger + tool bag	5017658062668

Socket not included

Specifications

DV18DBXL combi drill
WH18DBDL2 impact driver
DH18DBL SDS-Plus hammer drill
C18DBAL circular saw
G18DBAL angle grinder
CV18DBL multi tool
CR18DBL reciprocating saw
UB18DJL torch/work light

KTL818BL2

8 pce Brushless Cordless Kit



Li-ion
BRUSHLESS
Brushless Motor

Variant	Voltage	Contents	GTIN
KTL818BL2JAZ	18V	DV18DBXL + WH18DBDL2 + C18DBAL + G18DBAL + DH18DBL + CV18DBL + CR18DBL + UB18DJL + 2 x 6.0Ah Li-Ion batteries + UC18YSL3 charger + tool bag	5017658062675

Driver bits not included

Specifications

DV18DSDL combi drill
WH18DSAL impact driver
C18DSL circular saw
DH18DSL SDS-Plus hammer drill
CJ18DSL jigsaw
CR18DSL reciprocating saw
G18DSL angle grinder
R18DSL wet/dry vacuum
UB18DJL torch/work light

KTL918S2

9 pce Cordless Kit



Li-ion

Variant	Voltage	Contents	GTIN
KTL918S2JJ3Z	18V	DV18DSDL + WH18DSAL + C18DSL + CJ18DSL + DH18DSL + G18DSL + CR18DSL + R18DSL + UB18DJL + 3 x 5.0Ah Li-ion batteries + UC18YFSL charger + tool bag	5017658062682

Driver bits not included

Specifications

NR1890DC cordless framing nailer
NT1865DM cordless 16G finish nailer
2 x stackable cases

KTN218S

2 pce Nailer Kit



Li-ion

Variant	Voltage	Contents	Case	GTIN
KTN218SJJZ	18V	NR1890DC + NT1865DM + safety glasses + nose cap + wrenches + 2 x 5.0Ah Li-Ion batteries + UC18YSL3 charger	SC	5017658062699

Cordless heated clothing & stackable cases

BSL18UA

Battery Adapter



Specifications

Battery Voltage	14.4/18V Li-ion battery
Output Port	USB output x 2 (5V, total 2A), DC12V output x 1 (2A)
Battery Over discharge Protection	Yes
Auto Power-off Time	120 minutes
Dimensions (L x W x H):	
Without battery with BSL1850	92 x 75 x 56mm
Weight	117 x 80 x 102mm
	150g

Suitable for use with UJ1810DA jacket

USB output for phone charging

Variant	Voltage	Contents	GTIN
BSL18UAW6Z	14.4V/18V	BSL18UA(S) (body only)	4966376301669

HSC1/2/3/4

Stackable Case System

- Fully stackable and interlocking system
- Cases can be stacked in any order or configuration
- Optional wheeled trolley platform
- Optional insert boxes for HSC1, perfect for screws, nuts, bolts and other small loose items
- Optional moulded trays to fit a wide variety of HiKOKI mains and cordless tools



HSC4
295 x 395 x 315mm



HSC3
295 x 395 x 210mm



HSC2
295 x 395 x 158mm



HSC1
295 x 395 x 101mm



Castor Assembly

Part no	Description	Suitable for	Fits
402544	HSC1 - empty case with upper foam lining	General use	
402545	HSC2 - empty case with upper foam lining	General use	
402546	HSC3 - empty case with upper foam lining	General use	
402547	HSC4 - empty case with upper foam lining	General use	
402538	HSC1 with 3 boxes	Storage of small items	
402539	HSC2 with upper & lower foam lining	General use	
402540	HSC3 with upper & lower foam lining	General use	
402541	HSC4 with upper & lower foam lining	General use	
402543	Castor Tray	Transport	HSC1/2/3/4
402542	Organiser tray with 3 partitions	Storage of small items	HSC1
337746	Inner tray	General use	HSC1
336475	Plastic tray for 14/18V drill driver/combi/impact	All DS/DV/WH/WR series	HSC2
339776	Plastic tray for Multi Volt drill driver/combi drill	DS36DAX/DV36DAX	HSC2
336644	Plastic tray for 10.8V drill driver drill/impact driver	10.8V tools	HSC1
337740	Plastic tray for jigsaw	CJ110MV	HSC1
337741	Plastic tray for 2kg hammer drill	2kg hammers	HSC1
337764	Plastic tray for palm sander	SV13YA	HSC2
337114	Plastic tray for cordless hammer drill	DH18DSL	HSC2
337110	Plastic tray for cordless jigsaw, bottom for battery & charger	CJ18DSL	HSC3
337111	Plastic tray for cordless Jigsaw, upper for machine	CJ18DSL	HSC3
337112	Plastic tray for cordless screwdriver	WF18DSL	HSC3
337937	Plastic tray for multi tool	CV18DBL	HSC2
337288	Plastic tray for cordless corner drill	DN18DSL	HSC2
337113	Plastic tray for cordless grinder	G18DSL	HSC3
338872	Plastic tray for brushless grinder	G18DBAL	HSC3
370370	Plastic tray for Multi Volt grinder	G3612DA/G3613DB	HSC3
339368	Plastic tray for 2 pce drill/impact driver kit	Most 18V drills & impact drivers	HSC3
373646	Plastic tray for 185mm Multi Volt circular saw	C3607DA	HSC4
337742	Sponge tray for planer	P20SF/P18DSL	HSC3
337109	Sponge tray for cordless high-torque impact wrench	WR18DSHL	HSC3
337658	Sponge tray for circular saw	C7UY only	HSC4
337659	Sponge tray for circular saw	C6BU2/C7U2/C7BU2	HSC4
337529	Sponge tray for cordless circular saw	C18DSL	HSC4
373135	Sponge tray for Multi Volt SDS hammer drill	DH36DPA	HSC4
373138	Sponge tray for 165mm Multi Volt circular saw	C3606DA	HSC4
373223	Sponge tray for Multi Volt impact wrench	WR36DA/WR36DB	HSC3
337763	Sponge tray for router	M8V2	HSC2
370331	Sponge tray for brushless hammer drill/framing nailer	DH18DBL/NR1890DBCL	HSC4
371895	Sponge tray for finish nailer	NT1850DBSL/NT1865DBSL/ NT1865DBAL	HSC4
336472	Latch (C217817)	Spare	HSC1/2/3/4
336473	Handle (C112759)	Spare	HSC1/2/3/4
336474	Hinge (C345573)	Spare	HSC1/2/3/4
337743	Castor Latch	Spare for Castor Tray	402543
337744	Castor(A) w/o stopper	Spare for Castor Tray	402543
337745	Castor(B) with stopper	Spare for Castor Tray	402543

The HSC case range are covered by the standard 12 month warranty only

Mains Powered

Tools



D6SH

6mm Rotary Drill



Specifications

Chuck Capacity	0.5 – 6.5mm
Capacity: Steel	6.5mm
Wood	9mm
Power Input	240W
No Load Speed	4500/min
Overall Length	206mm
Weight	0.9kg



Variant	Voltage	Contents	Case	GTIN
D6SHJ1Z	230V	D6SH + depth stop + chuck key	X	4966376271436
D6SHJ2Z	110V	D6SH + depth stop + chuck key	X	4966376271443

D10VC3

10mm Rotary Drill



Specifications

Drill Chuck Capacity	10mm
Capacity:	
Steel (Twist Bit)	10mm
Wood (Flat	32mm
Spade Bit)	
Power Input	600W
No Load Speed	0 - 2500/min
Overall Length	242mm
Weight	1.4kg



Variant	Voltage	Contents	Case	GTIN
D10VC3J6Z	230V	D10VC3 (tool only)	X	4966376270064
D10VC3J7Z	110V	D10VC3 (tool only)	X	4966376270071

D10VF

10mm Rotary Drill



Specifications

Chuck Capacity	0.8–10mm
Capacity: Chuck	
Steel Twist Bit:	10mm
Wood Flat Bit:	25mm
Hole Saw:	29mm
Power Input	710W
No Load Speed	0–3000/min
Overall Length	265mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
D10VFJ6Z	230V	D10VF (tool only)	BM	4966376270125
D10VFJ7Z	110V	D10VF (tool only)	BM	4966376270132

D13VF

13mm Rotary Drill



Specifications

Chuck Capacity	1.5–13mm
Capacity:	
Steel Twist Bit:	13mm
Hole Saw:	50mm
Wood Auger Bit:	32mm
Hole Saw:	102mm
Power Input	710W
No Load Speed	0–850/min
Overall Length	290mm
Weight	2.0kg



Variant	Voltage	Contents	Case	GTIN
D13VFJ6Z	230V	D13VF + side handle	BM	4966376270873
D13VFJ7Z	110V	D13VF + side handle	BM	4966376270880

Drilling rotary & impact drills

D13

13mm Rotary Drill



Specifications

Chuck Capacity	1.5 - 13mm
Capacity: Steel	13mm
Wood	40mm
Power Input	720W
No Load Speed	550/min
Overall Length	378mm
Weight	3.0kg
	None



Variant	Voltage	Contents	Case	GTIN
D13J1Z	230V	D13 + side handle + chuck key	X	4966376270699
D13J2Z	110V	D13 + side handle + chuck key	X	4966376270705

FDV16VB2

16mm Impact Drill



Specifications

Drill Chuck	1.5-13mm
Capacity: Brick	16mm
Steel	13mm
Wood	25mm
Power Input	550W
No Load Speed	0-2900/min
Full Load Impact Rate	27360/min
Overall Length	289mm
Weight	1.6kg



Variant	Voltage	Contents	Case	GTIN
FDV16VB2J1Z	230V	FDV16VB2 + side handle + depth stop	BM	4966376298358
FDV16VB2J2Z	110V	FDV16VB2 + side handle + depth stop	BM	4966376298365

DV16V

16mm Impact Drill



Specifications

Drill Chuck	1.5-13mm
Capacity: Concrete	16mm
Steel	13mm
Power Input	590W
No Load Speed	0-2900/min
Full Load Impact Rate	34500/min
Overall Length	269mm
Weight	1.5kg



Variant	Voltage	Contents	Case	GTIN
DV16VJ6Z	230V	DV16V + side handle + depth stop	BM	4966376286317
DV16VJ7Z	110V	DV16V + side handle + depth stop	BM	4966376286324

Drill bit not included

DV18V

18mm Impact Drill



Specifications

Drill Chuck	1.5-13mm
Capacity: Concrete	18mm
Steel	13mm
Power Input	690W
No Load Speed	0-1000/0-3000/min
Full Load Impact Rate	8400/27300/min
Overall Length	333mm
Weight	2.0kg



Variant	Voltage	Contents	Case	GTIN
DV18VJ6Z	230V	DV18V + side handle + depth stop	IM	4966376287024
DV18VJ7Z	110V	DV18V + side handle + depth stop	IM	4966376287031

Drill bit not included

DV20VD

20mm Impact Drill

Aluminium housing body

Powerful 860W motor

Brush rotation system

Double moulded handle



RHB
ALUMINIUM HOUSING BODY

Specifications

Drill Chuck	1.5-13mm
Capacity: Concrete	20mm
Steel	13mm
Wood	40mm
Power Input	860W
No Load Speed	0-1100/3000/min
Full Load Impact Rate	8100/22000/min
Overall Length	363mm
Weight	3.0kg
Case	

Variant	Voltage	Contents	GTIN
DV20VDJ6Z	230V	DV20VD + side handle + depth stop	4966376287468
DV20VDJ7Z	110V	DV20VD + side handle + depth stop	4966376287475



Drill bit not included

DV20VB2

20mm Impact Drill



Specifications

Drill Chuck	1.5-13mm
Capacity: Concrete	20mm
Steel	13mm
Wood	40mm
Power Input	790W
No Load Speed	0-1000/3000/min
Full Load Impact Rate	0-13000/39000/min
Overall Length	333mm
Weight	2.2kg



Variant	Voltage	Contents	Case	GTIN
DV20VB2J6Z	230V	DV20VB2 + side handle + depth stop	IM	4966376287291
DV20VB2J7Z	110V	DV20VB2 + side handle + depth stop	IM	4966376287307

Drill bit not included

Demolition rotary hammer drills

DH24PX2

24mm SDS-Plus Rotary Hammer Drill

NEW



Variant	Voltage	Contents	Case	GTIN
DH24PXJ1Z	230V	DH24PX2 + side handle + depth stop	IM	4966376328574
DH24PXJ2Z	110V	DH24PX2 + side handle + depth stop	IM	4966376328574

Drill bit not included

Specifications

Capacity:	Concrete:
Drill Bit	3.4 - 24mm
Core Bit	25 - 50mm
Mild Steel	13mm
Wood	32mm
Power Input	730W
Impact Energy	2.7 Joules
Bit Shank	SDS-plus
No Load Speed	0 - 1050/min
Full Load Impact Rate	0 - 3950/min
Overall Length	349mm
Weight	2.8kg



DH26PX

26mm SDS-Plus Rotary Hammer Drill



Variant	Voltage	Contents	Case	GTIN
DH26PXJ1Z	230V	DH26PX + side handle + depth stop	IM	4966376283620
DH26PXJ2Z	110V	DH26PX + side handle + depth stop	IM	4966376283637

Drill bit not included

Specifications

Capacity:	Concrete:
Drill Bit	3.4-26mm
Core Bit	25-50mm
Mild Steel	13mm
Wood	32mm
Power Input	830W
Impact Energy	3.2J
Bit Shank	SDS-plus
No Load Speed	0-1100/min
Full Load Impact Rate	0-4300/min
Overall Length	367mm
Weight	2.8kg



DH28PX

28mm SDS-Plus Rotary Hammer Drill



UVP
USER VIBRATION PROTECTION

Variant	Voltage	Contents	Case	GTIN
DH28PXJ1Z	230V	DH28PX + side handle + depth stop	IM	4966376284351
DH28PXJ2Z	110V	DH28PX + side handle + depth stop	IM	4966376284368

Drill bit not included

Specifications

Capacity:	Concrete:
Drill Bit	3.4-28mm
Core Bit	25-50mm
Mild Steel	13mm
Wood	32mm
Power Input	850W
Impact Energy	3.4J
Bit Shank	SDS-plus
No Load Speed	0-1100/min
Full Load Impact Rate	0-4300/min
Overall Length	367mm
Weight	2.9kg



DH28PC

28mm SDS-Plus Rotary Hammer Drill



Specifications

Capacity:	Concrete:
Drill Bit	28mm
Core Bit	80mm
Mild Steel	13mm
Wood	32mm
Power Input	720W
Impact Energy	3.5J
Bit Shank	SDS-plus
No Load Speed	0-1050/min
Full Load Impact Rate	0-4000/min
Overall Length	316mm
Weight	3.5kg



Drill bit not included

DH40MC

40mm SDS-Max Rotary Demolition Hammer



Specifications

Capacity in concrete:	
Drill Bit	40mm
Core Bit	105mm
Power Input	1100W
Impact Energy	8.5J
Bit Shank	SDS max
No Load Speed	620/min
Full Load Impact Rate	2800/min
Overall Length	448mm
Weight	7.1kg



Variant	Voltage	Contents	Case	GTIN
DH40MCJ1Z	230V	DH40MC + side handle + depth stop + grease	IM	4966376284580
DH40MCJ2Z	110V	DH40MC + side handle + depth stop + grease	IM	4966376284597

Drill bit not included

DH40MEY

40mm SDS-Max Rotary Demolition Hammer



Specifications

Capacity in concrete:	
Drill Bit	40mm
Core Bit	105mm
Power Input	1150W
Impact Energy	11.0J
Bit Shank	SDS max
No Load Speed	250-500/min
Full Load Impact Rate	1430-2850/min
Overall Length	477mm
Weight	7.5kg



Variant	Voltage	Contents	Case	GTIN
DH40MEYJ1Z	230V	DH40MEY + side handle + depth stop + grease	IM	4966376284702
DH40MEYJ2Z	110V	DH40MEY + side handle + depth stop + grease	IM	4966376284719

Drill bit not included

DH45ME

45mm SDS-Max Rotary Demolition Hammer



Variant	Voltage	Contents	Case	GTIN
DH45MEJ1Z	230V	DH45ME + side handle + depth stop + grease	IM	4966376284832
DH45MEJ2Z	110V	DH45ME + side handle + depth stop + grease	IM	4966376284849

Drill bit not included

Specifications

Capacity in Concrete:	
Drill Bit	45mm
Core Bit	125mm
Power Input	1500W
Bit Shank	SDS max
Impact Energy	13.4J
No Load Speed:	
110V	120-270/min
230V	120-310/min
Full Load Impact Rate:	
110V	1200-2500/min
230V	1200-2950/min
Overall Length	535mm
Weight	9.0kg



DH52ME

52mm SDS-Max Rotary Demolition Hammer



Variant	Voltage	Contents	Case	GTIN
DH52MEJ1Z	230V	DH52ME + side handle + depth stop + grease	IM	4966376285129
DH52MEJ2Z	110V	DH52ME + side handle + depth stop + grease	IM	4966376285136

Drill bit not included

Specifications

Capacity in Concrete:	
Drill Bit	52mm
Core Bit	160mm
Power Input	1500W
Bit Shank	SDS max
Impact Energy	22.0J
No Load Speed:	
110V	110-260/min
230V	110-280/min
Full Load Impact Rate:	
110V	1000-2200/min
230V	1000-2400/min
Overall Length	585mm
Weight	11.0kg



Demolition demolition hammers

NEW

H41MB2 SDS-Max Demolition Hammer

Power Input	950W
Full Load Impact Rate	3000/min
Impact Energy	7.0 Joules
Bit Shank	SDS-Max
Overall Length	427mm
Weight	5.24kg



Lightweight design

Low vibration handle

High demolition performance

Variant	Voltage	Contents	Case	GTIN
H41MB2J1Z	230V	H41MB2 + bull point + side handle	IM	4966376267750
H41MB2J2Z	110V	H41MB2 + bull point + side handle	IM	4966376267767



H45MEY SDS-Max Demolition Hammer

AC Brushless
BRUSHLESS
Brushless Motor

AHB
ALUMINIUM HOUSING BODY

UVP
USER VIBRATION PROTECTION



Specifications

Power Input	1150W
Full Load Impact Rate	1430 – 2850/min
Impact Energy	8.5 Joules
Bit Shank	SDS max
Overall Length	480mm
Weight	7.3kg



H60MC SDS-Max Demolition Hammer



Specifications

Power Input	1250W
Full Load Impact Rate	1600/min
Impact Energy	22 Joules
Bit Shank	SDS max
Overall Length	570mm
Weight	10.2kg



AHB
ALUMINIUM HOUSING BODY

Variant	Voltage	Contents	Case	GTIN
H60MCJ1Z	230V	H60MC + bull point + side handle	BM	4966376288427
H60MCJ2Z	110V	H60MC + bull point + side handle	BM	4966376288434

H60MEY

SDS-Max Demolition Hammer



Power Input	1500W
Full Load Impact Rate	1500 – 2100/min
Impact Energy	20 Joules
Bit Shank	SDS max
Overall Length	585mm
Weight	12.2kg



H65SD3

28mm Demolition Hammer



Power Input	1340W
Full Load Impact Rate	1400/min
Impact Energy	28 Joules
Bit Shank	28.5mm Hex
Overall Length	848mm
Weight	20.1kg



Variant	Voltage	Contents	Case	GTIN
H65SD3J2Z	110V	H65SD3 + side handle	BM	4966376288939

Point not included

H90SG

28.5mm Demolition Hammer



Specifications

Power Input	1560W
Full Load Impact Rate	1000/min
Impact Energy	70 Joules
Bit Shank	28.5mm Hex
Overall Length	860mm
Weight	32.0kg



Variant	Voltage	Contents	Case	GTIN
H90SGJ2Z	110V	H90SG + wrench	X	4966376289080

Point not included

Fastening screwdrivers & impact wrenches

W6VB3

6mm Screwdriver



Specifications

Capacity: Drywall Screw	6mm
Self-Drilling Screw	6mm
Wood Screw (D x L)	5.8 x 50mm
Bit Shank	6.35mm (1/4") hex
Power Input	620W
No Load Speed	0 – 2600/min
Overall Length	312mm
Weight	1.5kg
Case	None



Variant	Voltage	Contents	Case	GTIN
W6VB3J2Z	110V	W6VB3 + Magnetic bit holder + sub stopper	X	4966376280681

W8VB2

8mm Screwdriver



Specifications

Capacity: Drywall Screw	6mm
Self-Drilling Screw	8mm
Wood Screw (D x L)	6.2 x 50mm
Bit Shank	6.35mm (1/4") Hex
Power Input	620W
No Load Speed	0 – 1700/min
Overall Length	312mm
Weight	1.5kg



Variant	Voltage	Contents	Case	GTIN
W8VB2J2Z	110V	W8VB2 + Magnetic bit holder + sub stopper	X	4966376280841

WR16SE
16mm Impact Wrench



Specifications

Capacity: Ordinary Bolt	12 - 22mm
High Tension Bolt	12 - 16mm
Tightening Torque	360Nm
Square Drive	12.7mm (1/2")
Power Input	370W
No Load Speed: Max	1600/min
High	1400/min
Mid	1300/min
Low	1100/min
Impact Rate: Max	1900/min
High	1700/min
Mid	1500/min
Low	1300/min
Overall Length	228mm
Weight	2.5kg



Variant	Voltage	Contents	Case	GTIN
WR16SEJ1Z	230V	WR16SE (tool only)	X	4966376289851
WR16SEJ2Z	110V	WR16SE(tool only)	X	4966376289868

Socket not included

WR22SE

22mm Impact Wrench



Specifications

Capacity: Ordinary Bolt	14 - 24mm
High Tension Bolt	16 - 22mm
Tightening Torque	620Nm
Square Drive	19mm (3/4")
Power Input	800W
No Load Speed	1400/min
Impact Rate	2000/min
Overall Length	280mm
Weight	4.6kg



Variant	Voltage	Contents	Case	GTIN
WR22SEJ1Z	230V	WR22SE + side handle	IM	4966376290048
WR22SEJ2Z	110V	WR22SE + side handle	IM	4966376290055

Socket not included

WR25SE

25mm Brushless Impact Wrench



Brushless Motor

Aluminium housing body

1000Nm hard torque

Soft grip handles

Specifications

Capacity: Ordinary Bolt	22 - 30mm
High Tension Bolt	22 - 24mm
Tightening Torque	1000Nm
Square Drive	25.4mm (1")
Power Input	900W
No Load Speed	1100/min
Impact Rate	1500/min
Overall Length	340mm
Weight	7.7kg



Variant	Voltage	Contents	Case	GTIN
WR25SEJ1Z	230V	WR25SE + side handle	IM	4966376290239
WR25SEJ2Z	110V	WR25SE + side handle	IM	4966376290246

Socket not included

Sawing circular saws

C7ST

185mm Circular Saw



Specifications

Capacity: Blade Dia.	185mm
Bore	30mm
Max Cut Depth: 90°	62mm
45°	47.5mm
Bevel Capacity	0-45°
Power Input	1710W
No Load Speed	6000/min
Overall Length	310mm
Weight	4.3kg



Variant	Voltage	Contents	Case	GTIN
C7STJ1Z	230V	C7ST + blade + guide + wrench	BM	4966376292578
C7STJ2Z	110V	C7ST + blade + guide + wrench	BM	4966376292585

C7SB3

185mm Circular Saw



Specifications

Capacity: Blade Dia	185mm
Bore	30mm
Max Cut Depth: 90°	62mm
45°	47.5mm
Power Input	1710W (110V:1670W)
No Load Speed	6000/min
Overall Length	308mm
Weight	4.3kg



Variant	Voltage	Contents	Case	GTIN
C7SB3J1Z	230V	C7SB3 + blade + guide + dust adapter + wrench + short lever	BM	4966376292158
C7SB3J2Z	110V	C7SB3 + blade + guide + dust adapter + wrench + short lever	BM	4966376292165

C7U3

190mm Circular Saw



Specifications

Capacity: Blade Dia	190mm
Bore	30mm
Max Cut Depth: 90°	66mm
45°	48mm
Power Input	1300W (110V:1200W)
No Load Speed	5800/min
Overall Length	314mm
Weight	4.7kg



Variant	Voltage	Contents	Case	GTIN
C7U3J6Z	230V	C7U3 + blade + guide + dust adapter + wrench + short lever	BM	4966376292653
C7U3J7Z	110V	C7U3 + blade + guide + dust adapter + wrench + short lever	BM	4966376292660

C9U3

235mm Circular Saw



Specifications

Capacity: Blade Dia.	235mm
Bore	30mm
Max Cut Depth: 90°	86mm
45°	65mm
Power Input	2000W (110V:1670W)
No Load Speed	5200/min
Overall Length	397mm
Weight	7.2kg



CJ90VST

Jigsaw



Specifications

Capacity:	
Wood	90mm
Mild Steel Plate	8mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Power Input	705W
Length of Stroke	20mm
No-Load Speed(stroke)	850 - 3000/min
Overall Length	228mm
Weight	2.2kg



CJ110MV

Jigsaw



Specifications

Capacity: Wood	110 mm
Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Base Tilt Angle	45° Right/Left
Power Input	720W
Length of Stroke	26mm
No-Load Speed(stroke)	850 - 3000/min
Overall Length	246mm
Weight	2.2kg



CJ160V

Jigsaw



Specifications

Capacity: Wood	160mm
Aluminium	20mm
Mild Steel Plate	10mm
Min. Cutting Radius	25mm
Power Input	800W
Length of Stroke	26mm
No-Load Speed (stroke)	800 - 2800/min
Overall Length	249mm
Weight	2.5kg



CJ160VJ

Jigsaw

Variant	Voltage	Contents	Case	GTIN
CJ160VJ1Z	230V	CJ160V + 3 blades + sub base + splinter guard + chip cover + dust adapter + wrench	BM	4966376293841
CJ160VJ2Z	110V	CJ160V + 3 blades + sub base + splinter guard + chip cover + dust adapter + wrench	BM	4966376293858

Sawing mitre saws

C8FSHG

216mm Slide Compound Mitre Saw

NEW



Specifications

Capacity:	
Blade Dia.	255mm
Bore	30mm
Cross Cut: 0°	65 x 280/54 x 305mm
Mitre Cut: 45°	65 x 203/54 x 210mm
Left Bevel Cut: 45°	38 x 280/26 x 305mm
Power Input	1100W
No Load Speed	5300/min
Mitre Angle	45° left/right
Bevel Angle	47° left/2° right
Weight	13.8kg

C8FSE

216mm Slide Compound Mitre Saw



Specifications

Capacity:	
Blade Dia.	216mm
Bore	30mm
(H x W) Cross Cut: 0°	65 x 312mm
Mitre Cut: 45°	65 x 220mm
Bevel Cut: 45°	45 x 312mm
Compound: Mitre 45° and Bevel 45°	45 x 220mm
Power Input	1050W
No Load Speed	5500/min
Mitre Angle: Right	0 - 57°
Left	0 - 45°
Bevel Angle: Right	0 - 5°
Left	0 - 48°
Positive Mitre Angle Stop	0, 15, 22.5, 31.6 and 45°
Dimensions	555 x 790 x 485mm
Weight	14kg

C10FCE2

255mm Compound Mitre Saw



Specifications

Capacity:	
Blade Dia.	255mm
Bore	30mm
(H x W) Cross Cut: 0°	59 x 144mm or 89 x 101mm
Mitre Cut: 45°	59 x 102mm or 89 x 70mm
Mitre Cut: 52°	59 x 89mm or 89 x 54mm
Bevel Cut: 45°	41 x 144mm
Compound: Mitre 45° and Bevel 45°	41 x 102mm
Power Input	1520W
No Load Speed	5000/min
Mitre Angle: Right	0 - 52°
Left	0 - 52°
Bevel Angle: Left	0 - 45°
Positive Mitre Angle Stop	0, 15, 22.5, 31.6 and 45°
Dimensions	460 x 628 x 561mm
Weight	11.9kg

C12RSH2

305mm Slide Compound Mitre Saw



Specifications

Blade Dia.	305mm
Bore	30mm
Capacity (H x W):	
Cross Cut 0°	105 x 312mm
Mitre Left/Right 45°	105 x 220mm
Bevel Left 45°	68 x 312mm
Bevel Right 45°	43 x 312mm
Bevel (Left) 45° + Mitre (Left) 45°	68 x 220mm
Bevel (Left) 45° + Mitre (Right) 31°	68 x 265mm
Bevel (Right) 45° + Mitre (Right) 45°	43 x 220mm
Bevel (Right) 45° + Mitre (Left) 31°	43 x 265mm
Power Input	1520W
No Load Speed	4000/min
Mitre Angle	Right: 0-57° Left: 0-45°
Bevel Angle	Right: 0-45° Left: 0-45°
Positive Mitre Angle Stops	0, 15, 22.5, 31.6 and 45°
Dimensions	655 x 890 x 724mm
Weight	27kg

C12RSH2JZ

305mm Slide Compound Mitre Saw

Variant	Voltage	Contents	Case	GTIN
C12RSH2J1Z	230V	C12RSH2 + dust bag + vice assembly + wrench	X	4966376291151
C12RSH2J2Z	110V	C12RSH2 + dust bag + vice assembly + wrench	X	4966376291168

110V **ISP STOP** 999038 230V **ISP STOP** 999065

712650

Universal Workstation



Specifications

Weight:	27.7kg
Maximum load	136kg
Maximum width of extension arms	2.35m
Size of extended stand:	1416 x 651 x 916mm (L x W x H)

Variant	Case	GTIN
712650Z	X	8717574043532

CR13V2

130mm Reciprocating Saw



Specifications

Capacity:	
Pipe	130mm
Steel Plate	19mm
Wood	300mm
Power Input	1010W
Length of Stroke	29mm
No-Load Speed(stroke)	0-2800/min
Overall Length	435mm
Weight	3.3kg



999043

Variant	Voltage	Contents	Case	GTIN
CR13V2J1Z	230V	CR13V2 + blade + wrenches	BM	4966376282272
CR13V2J2Z	110V	CR13V2 + blade + wrenches	BM	4966376282289

CR13VBY

130mm Reciprocating Saw



UVP
USER VIBRATION PROTECTION

Specifications

Capacity:	
Pipe	130mm
Steel Plate	19mm
Wood	300mm
Power Input	1150W
Length of Stroke	32mm (1-1/4")
No-Load Speed(stroke)	0 – 3000/min
Overall Length	465mm
Weight	4.4kg



999043

Variant	Voltage	Contents	Case	GTIN
CR13VBYJ1Z	230V	CR13VBY + blade	BM	4966376282432
CR13VBYJ2Z	110V	CR13VBY + blade	BM	4966376282449

CR13VEY

Brushless Reciprocating Saw

NEW



BRUSHLESS
Brushless Motor
UVP
USER VIBRATION PROTECTION

Specifications

Capacity:	
Pipe	130mm
Steel Plate	19mm
Wood	300mm
Power Input	1100W
Length of Stroke	32mm
No-Load Speed(stroke)	0–3000/min
Overall Length	490mm
Weight	3.9kg

Variant	Voltage	Contents	Case	GTIN
CR13VEYJ1Z	230V	CR13VEY + blade	BM	4966376282432
CR13VEYJ2Z	110V	CR13VEY + blade	BM	4966376282449

Routing & Planing routers & planer

CV350V

Multi Tool



Li-ion
Brushless Motor

Specifications

Power Input	350W
Oscillation Frequency:	
Standard Mode (Dial 1 - 5)	6000 - 20000/min
AUTO Mode (Dial A)	15000 - 20000/min
Oscillation Angle	3.2°
Overall Length	280 mm
Weight	1.5kg



Variant	Voltage	Contents	Case	GTIN
CV350VJ3Z	230V	CV350V + blades + sandpaper + sanding pad + tool box	SC	4966376294619
CV350VJ4Z	110V	CV350V + blades + sandpaper + sanding pad + tool box	SC	4966376294626

M8V2

1/4" Router



Specifications

Capacity: Collet Chuck	8.35mm (1/4")
Plunge Depth	60mm
Power Input	1150W
No Load Speed	11000 – 25000/min
Weight	3.6kg



Variant	Voltage	Contents	Case	GTIN
M8V2J1Z	230V	M8V2 + straight guide + template guide + wrench	BM	4966376295500
M8V2J2Z	110V	M8V2 + straight guide + template guide + wrench	BM	4966376295517

M12VE

1/2" Router



Specifications

Capacity: Collet Chuck	12.7mm (1/2")
Plunge Depth	65mm
Power Input	2000W (230V), 1570W (110V)
No Load Speed	8000-22000/min
Weight	5.3kg



Variant	Voltage	Contents	Case	GTIN
M12VEJ6Z	230V	M12VE + straight guide + template guide + wrench	BM	4966376295319
M12VEJ7Z	110V	M12VE + straight guide + template guide + wrench	BM	4966376295326

M12V2

1/2" Router



Specifications

Capacity: Collet Chuck	12.7mm (1/2")
Plunge Depth	65mm
Power Input	2000W
No Load Speed	8000 – 22000/min
Weight	6.3kg



Variant	Voltage	Contents	Case	GTIN
M12V2J1Z	230V	M12V2 + 2 collet chucks + centring gauge + straight guide + template guide + template guide adapter + dust guide + dust guide adapter+ wrench	BM	4966376295111
M12V2J2Z	110V	M12V2 + 2 collet chucks + centring gauge + straight guide + template guide + template guide adapter + dust guide + dust guide adapter+ wrench	BM	4966376295128

P20SF

Planer



Capacity: Cutting Width	82mm
Max Cutting Depth	2.6mm
Power Input	620W
No Load Speed	17000/min
Overall Length	296mm
Weight	2.5kg

999021

Variant	Voltage	Contents	Case	GTIN
P20SFJ1Z	230V	P20SF + blade setting gauge + guide + wrench	BM	4966376295951
P20SFJ2Z	110V	P20SF + blade setting gauge + guide + wrench	BM	4966376295968

SV15YC

150mm Random Orbit Sander



Specifications

Capacity: Sanding Pad	150mm
Power Input	350W
Orbit Dia.	2.8/6.2mm
No Load Speed*1	4200 - 11000/min
Overall Length	182mm
Weight	2.5kg

□ ☁ ☈ ↕ 110V 371858 230V 371859

Variant	Voltage	Contents	Case	GTIN
SV15YCJ1Z	230V	SV15YC + sanding paper + dust bag + wrench	X	4966376280148
SV15YCJ2Z	110V	SV15YC + sanding paper + dust bag + wrench	X	4966376280155

SV13YA

125mm Random Orbit Sander



Specifications

Capacity: Sanding Pad	125mm
Power Input	230W
Orbit Dia.	3.2mm
No Load Speed	7000 - 12000/min
Overall Height	145mm
Weight	1.4kg

□ ☁ ☈ ↕ 999041

Variant	Voltage	Contents	Case	GTIN
SV13YAJ1Z	230V	SV13YA + sanding paper + dust bag	BM	4966376279845
SV13YAJ2Z	110V	SV13YA + sanding paper + dust bag	BM	4966376279852

Sanding & Polishing sanders & sander/polisher

Specifications

SV12SG

Palm Sander



Capacity: Pad Size	110 x 100mm
Power Input	200W
Orbital Dia.	1.5mm
No Load Speed: Spindle Orbit	14000/min 28000/min
Overall Length	137mm
Weight	1.1kg



Variant	Voltage	Contents	Case	GTIN
SV12SGJ1Z	230V	SV12SG + sanding paper + dust bag + punch plate	X	4966376279555
SV12SGJ2Z	110V	SV12SG + sanding paper + dust bag + punch plate	X	4966376279562

SB8V2

76mm Belt Sander



Specifications

Capacity: Belt Size	76 x 533mm
Power Input	1020W
No-Load Belt Speed	250 - 450m/min
Overall Length	318mm
Weight	4.3kg



Variant	Voltage	Contents	Case	GTIN
SB8V2J1Z	230V	SB8V2 + sanding belt + dust bag	X	4966376296743
SB8V2J2Z	110V	SB8V2 + sanding belt + dust bag	X	4966376296750

SB10V2

100mm Belt Sander



Specifications

Capacity: Belt Size	100 x 610mm
Power Input	1020W
No-Load Belt Speed	240 - 420m/min
Overall Length	363mm
Weight	5.2kg



Variant	Voltage	Contents	Case	GTIN
SB10V2J1Z	230V	SB10V2 + sanding belt + dust bag	X	4966376296590
SB10V2J2Z	110V	SB10V2 + sanding belt + dust bag	X	4966376296606

SP18VA

Sander/Polisher



Specifications

Capacity: Sanding Disc	180mm
Wool Bonnet	180mm
Spindle Thread	M14 x 2
Power Input	1250W
No Load Speed	0 - 3400/min
Overall Length	415mm
Weight	2.8kg



Variant	Voltage	Contents	Case	GTIN
SP18VAJ1Z	230V	SP18VA + loop handle + rubber pad + wool bonnet + sanding disc + wrench	X	4966376279197
SP18VAJ2Z	110V	SP18VA + loop handle + rubber pad + wool bonnet + sanding disc + wrench	X	4966376279203

GP2S2

Die Grinder



Specifications

Capacity: Collet Chuck	6mm
Max. Wheel Dia	25mm
Power Input	520W
No Load Speed	29000/min
Overall Length	360mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
GP2S2J2Z	110V	GP2S2 + wrenches	X	4966376277575

Wheel not included

G10SR4

100mm Angle Grinder



Specifications

Capacity: Wheel Dia	100mm
Hole Dia	16mm
Spindle Thread	M10 x 1.5
Power Input	730W
No Load Speed	10000/min
Overall Length	258mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
G10SR4J5Z	230V	G10SR4 + side handle + wrench	X	4966376271887
G10SR4J6Z	110V	G10SR4 + side handle + wrench	X	4966376271894

Abrasive wheel not included

G12STX

115mm Angle Grinder



Specifications

Capacity: Wheel Dia	115mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	600W
No Load Speed	11500/min: 230V 12000/min: 110V
Overall Length	254mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
G12STXJ5Z	230V	G12STX + side handle + wrench	X	4966376273225
G12STXJ6Z	110V	G12STX + side handle + wrench	X	4966376273232

Abrasive wheel not included

Grinding angle grinders

G12STX/CD

115mm Angle Grinder Kit



Specifications

Capacity: Wheel Dia	115mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	600W
No Load Speed	11500/min: 230V 12000/min: 110V
Overall Length	254mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
G12STXJ7Z	230V	G12STX diamond wheel + + side handle + wrench	BM	4966376273249
G12STXJ8Z	110V	G12STX diamond wheel + + side handle + wrench	BM	4966376273256

Abrasive wheel not included

G12SR4

115mm Angle Grinder



Specifications

Capacity: Wheel Dia	115mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	730W
No Load Speed	10000/min
Overall Length	258mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
G12SR4J5Z	230V	G12SR4 + side handle + wrench	X	4966376272938
G12SR4J6Z	110V	G12SR4 + side handle + wrench	X	4966376272945

Abrasive wheel not included

G12SN2

115mm Angle Grinder



Specifications

Capacity: Wheel Dia	115mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	900W
No Load Speed	10500/min
Overall Length	266mm
Weight	1.8kg



Variant	Voltage	Contents	Case	GTIN
G12SN2J5Z	230V	G12SN2 + side handle + wrench	X	4966376272716
G12SN2J6Z	110V	G12SN2 + side handle + wrench	X	4966376272723

Abrasive wheel not included

G12SE2

115mm Angle Grinder



Specifications

Capacity: Wheel Dia	115mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	1200W
No Load Speed	11000/min
Overall Length	321mm
Weight	2.2kg

**G13SE2**

125mm Angle Grinder



Specifications

Capacity: Wheel Dia.	125mm
Hole Dia.	22.23mm
Spindle Thread	M14 x 2
Power Input	1200W
No Load Speed	11000/min
Overall Length	321mm
Weight	1.9kg

**G13YC2**

125mm Angle Grinder with soft start



Specifications

Capacity: Wheel Dia	125mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	1500W
No Load Speed	10500/min
Overall Length	323mm
Weight	2.0kg

**G18SE4**

180mm Angle Grinder

NEW



Specifications

Capacity: Wheel Dia	180mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No-Load Speed	8500/min
Overall Length	492mm
Weight	5.9kg



Variant	Voltage	Contents	Case	GTIN
G18SE4J1Z	230V	G18SE4 + side handle + wrench	X	4966376326136
G18SE4J2Z	110V	G18SE4 + side handle + wrench	X	4966376326143

Abrasive wheel not included

Grinding angle & die grinders

G23ST

230mm Angle Grinder



Specifications

Capacity: Wheel Dia	230mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	2000W
No Load Speed	6600/min
Overall Length	469mm
Weight	5.1kg



Variant	Voltage	Contents	Case	GTIN
G23STJ1Z	230V	G23ST + side handle + wrench	X	4966376276677
G23STJ2Z	110V	G23ST + side handle + wrench	X	4966376276684

Abrasive wheel not included

G23ST/CD

230mm Angle Grinder Kit



Specifications

Capacity: Wheel Dia	230mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	2000W
No Load Speed	6600/min
Overall Length	469mm
Weight	5.1kg



Variant	Voltage	Contents	Case	GTIN
G23STCDJ1Z	230V	G23ST + diamond wheel + side handle + wrench	BM	5017658063986
G23STCDJ2Z	110V	G23ST + diamond wheel + side handle + wrench	BM	5017658063993

Abrasive wheel not included

G23SC4

230mm Angle Grinder

NEW



Specifications

Capacity: Wheel Dia	230mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No Load Speed	6600/min
Overall Length	492mm
Weight	6.1kg



Variant	Voltage	Contents	Case	GTIN
G23SC4J1Z	230V	G23SC4 + side handle + wrench	X	4966376326020
G23SC4J2Z	110V	G23SC4 + side handle + wrench	X	4966376326037

Abrasive wheel not included

G23MR

230mm Angle Grinder with aluminium body



Specifications

Capacity: Wheel Dia	230mm
Hole Dia	22.23mm
Spindle Thread	M14 x 2
Power Input	2400W
No Load Speed	6600/min
Overall Length	492mm
Weight	5.4kg



Variant	Voltage	Contents	Case	GTIN
G23MRJ1Z	230V	G23MR + side handle + wrench	X	4966376276073
G23MRJ2Z	110V	G23MR + side handle + wrench	X	4966376276080

Abrasive wheel not included

CN16SA

Nibbler



Specifications

Capacity: Steel	1.6mm
Stainless	1.2mm
Cutting Width	5mm
Min. Cutting Radius	40mm
Power Input	400W
No Load Speed	2300/min
Overall Length	250mm
Weight	1.6kg



Variant	Voltage	Contents	Case	GTIN
CN16SAJ1Z	230V	CN16SAJ1Z + 2 wrenches	X	4966376269914
CN16SAJ2Z	110V	CN16SAJ1Z + 2 wrenches	X	4966376269921

CC14SF

355mm Cut-off Machine



Specifications

Capacity: Bar Dia.	65mm
Pipe Dia.	120mm
Shaped Steel	130 x 130mm
Power Input	2000W
No Load Speed	3800/min
Dimensions (L x W x H)	603 x 318 x 603mm
Weight	16.5kg



Variant	Voltage	Contents	Case	GTIN
CC14SFJ1Z	230V	CC14SF + wrench	X	4966376281312
CC14SFJ2Z	110V	CC14SF + wrench	X	4966376281329

Wheel not included

CM12Y

305mm Disc Cutter



Specifications

Capacity: Wheel Dia.	305mm
Max. Cut Depth	100mm
Cut Depth per one cutting	50mm
Power Input	2400W
No Load Speed	5000/min
Arbor	22mm
Overall Length	633mm
Weight	11.5kg



Variant	Voltage	Contents	Case	GTIN
CM12YJ1Z	230V	CM12Y + dust adapter + safety glasses + wrench	X	4966376281688
CM12YJ2Z	110V	CM12Y + dust adapter + safety glasses + wrench	X	4966376281695

Diamond wheel not included

Miscellaneous mixers & blower

UM12VST

120mm Mixer



Specifications

Capacity: Max Stirrer Dia.	120mm
Power Input	1100W
Tool Spindle Thread	M14
No Load Speed : High	300 - 650/min
: Low	150 - 300/min
Overall Length	325mm
Weight	5.4kg



UM16VST

160mm Mixer



Specifications

Capacity: Max Stirrer Dia.	160mm
Power Input	1500W
Tool Spindle Thread	M14
No Load Speed : High	300 - 650/min
: Low	150 - 300/min
Overall Length	335mm
Weight	5.6kg



RB40VA

Blower



Specifications

Capacity: Air Pressure	5.5 kPa
Air Volume Flow	3.8 m³/min
Power Input	550W
No Load Speed	16000min
Overall Length	447mm
Weight	1.7kg



Variant	Voltage	Contents	Case	GTIN
RB40VAJ1Z	110V	RB40VA + nozzle + dust bag	X	4966376278329
RB40VAJ2Z	230V	RB40VA + nozzle + dust bag	X	4966376278336

NT65GS

65mm Gas Straight Finish Nailer

Li-ion



Specifications

Driving System	Piston Reciprocating Action (Gas Powered)
Nail Size	16 gauge
Nail Length	25-65mm
Driving Speed	2 nails/sec.
Loading capacity of magazine	100 nails
Dimensions (L x H)	268 x 282mm
Weight	1.8kg

1.5Ah
Li-ion

NT65GB

65mm Gas Angled Finish Nailer

Li-ion



Specifications

Driving System	Piston Reciprocating Action (Gas Powered)
Nail Size	16 gauge
Nail Length	32-65mm
Magazine Angle	20°
Driving Speed	2 nails/sec.
Loading capacity	100 nails
Dimensions (L x H)	268 x 282mm
Weight	1.8kg

1.5Ah
Li-ion

NR90GC2

90mm Gas Framing Nailer

Li-ion



Specifications

Driving System	Piston Reciprocating Action (Gas powered)
Nail Size	3.0-3.3mm
Nail Length	50-90mm
Magazine Angle	34 degrees
Driving Speed	2 - 3 nails/sec
Loading capacity of magazine	25 - 37 nails
Dimensions (L x H)	347 x 353mm
Weight	3.5 kg

1.5Ah
Li-ion

NT50AE2

50mm Brad Nailer

Variants

- NT50AE2L2Z




Specifications

Driving System	Piston Reciprocating Action
Operating Pressure Range	4.9-8.3 bar (70 – 120psi)
Driving Speed	3 nails/sec.
Nail Size	18 gauge
Nail Length	16-50mm
Loading capacity	100 nails
Air Inlet	NPT 1/4 Thread
Dimensions (L x H)	254 x 233mm
Weight	1.0kg

Variant	Contents	Case	GTIN
NT50AE2L2Z	NT50AE2 + nose cap + safety glasses	BM	4966376297160

Spares carbon brushes

	Model	Part Number			Model	Part Number			Model	Part Number		
		Standard type	Auto-stop type			Standard type	Auto-stop type			Standard type	Auto-stop type	
C	C7	999043	999073		C	CR13VBY	999043	999073	G	G10SR4	999067	--
	C7BU3	999043	--			CR13VC	999043	999073		G10SS2	999067	--
	C7SB3	999043	--			CR18DL	999058	--		G12SE2	999088	999076
	C7SS	999043	999073			CR18DSL	999058	--		G12SN2	999005	--
	C7ST	999091				CV350V	999005	--		G12SR4	999067	--
	C7U3	999043	--		D	D6SH	999041	999072		G12SS2	999067	--
	C7UR	999038	--			D10VC3	999041	999072		G12STX	999067	--
	C7UY	999043	999073			D10VF	999041	999072		G13SB3	999088	999076
	C8FSE	999021	--			D10VG	999041	999072		G13SC2	999043	999073
	C8FSHE	999001	--			D10VST	999041	999072		G13SE2	999088	999076
	C8FSHG:					D10YB	999021	999070		G13YC2	999088	999076
	110V	375563	--			D13	999043	999073		G13YG	372939	--
	230V	375618	--			D13VB3	999041	999072		G14DL	999054	--
	C9BU3	999038	--			D13VF	999041	999072		G18DL	999054	--
	C9U3	999038	--			DH18DL	999100	--		G18DSL	999054	--
	C10FCE2:					DH18DSL	999100	--		G18SE3	999061	
	110V	999038	--			DH24DVC	999100	--		G18SE4	999061	999089
	230V	999065	--			DH24PG	999041	999072		G23MR	999061	999089
	C10FCH2:					DH24PH	999041	999072		G23SC3	999061	--
	110V	999038	--			DH24PX	999041	999072		G23SC4	999061	999089
	230V	999065	--			DH24PX2	999041	999072		G23ST	999059	999093
	C10FSB	999043	999073			DH25DAL	--	999090		GP2S2	999088	999076
	C10FSH	999043	999073			DH25DL	--	999090		GP5V	999088	999076
	C12FCH:					DH26PB	999041	999072		H25PV	999056	--
	110V	999038	--			DH26PC	999041	999072		H41	999043	999073
	230V	999065	--			DH26PX	999041	999072		H41MB2	999043	999073
	C12LCH:					DH28PBY	999041	999072		H41SA3	999043	999073
	110V	999038	--			DH28PC	999004	--		H41SD	999043	999073
	230V	999065	--			DH28PCY	999041	999072		H50	999043	999073
	C12RSH2:					DH28PD	999004	--		H60MC	--	999074
	110V	999038	--			DH28PX	999041	999072		H65SC	--	999086
	230V	999065	--			DH30PC2	--	999073		H65SD3	--	999086
	CC12Y	999044	999074			DH36DL	--	999090		H70SA	--	999086
	CC14SF	999044	999074			DH40MC	999043	999073		H70SD	--	999086
	CD7SA	999043	999073			DN18DSL	999054	--		H90SG	--	999086
	CE16SA	999021	999070			DS18DL2	999054	--		M6SB	999021	999070
	CE18DSL	999054	--			DS18DSAL	999054	--		M8V2	999043	999073
	CG18DSDL	999016	--			DS18DSDL	999054	--				
	CJ65V3	999041	999072			DV16V	999041	999072				
	CJ90VST	999041	999072			DV18DSDL	999054	--				
	CJ110MV	999041	999072			DV18V	999041	999072				
	CJ160V	999041	999072			DV20VB2	999041	999072				
	CM5SB	999088	999076			DV20VD	999088	999076				
	CM9SR	999044	999074			F	FCJ65V3	999041	--			
	CM12Y	999044	999074			FD10SA	999041	--				
	CN16SA	999021	999070			FDV16VB2	999041	--				
	CN18DSL	999054	--									
	CR13V2	999043	999073									
	CR13VB	999043	999073									

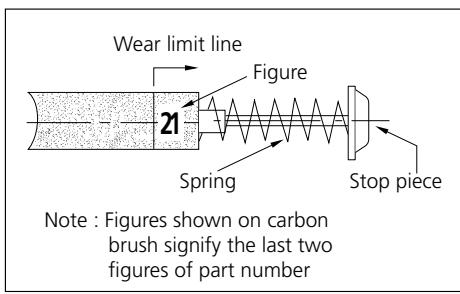



HiKOKI Power Tools (UK) Ltd

Precedent Drive, Rooksley
Milton Keynes MK13 8PJ

Tel: Sales office: 01908 354700
Service: 01908 354733

Email: info@hikoki-powertools.co.uk

**Follow us on social media and never miss out
on the latest HiKOKI news**



hikoki-powertools.co.uk

Distributed by: